



Hoods


Stable zinc-cast hoods supporting standard connector strips of types F, DM and H according to EN IEC 60603-2 (DIN41612). The two-part TRAC F hood made of die-cast zinc enables the connection of six cables with outer diameters of up to 12 mm. Each of the 6-cable inlets can be fitted with a 360° EMV shielding. In addition, the connector can be coded if needed, to avoid incorrect connections.

Up to a cable diameter of <12 mm, the same cable clamps as for the data plugs D-SUB TRAC are used and also the same compression tools can be used accordingly.

The assembled plug meets the following requirements:

EN 60529 protection class IP44/used in interior rooms

IEC 61373; VDE 0115-106 (oscillations and shock)

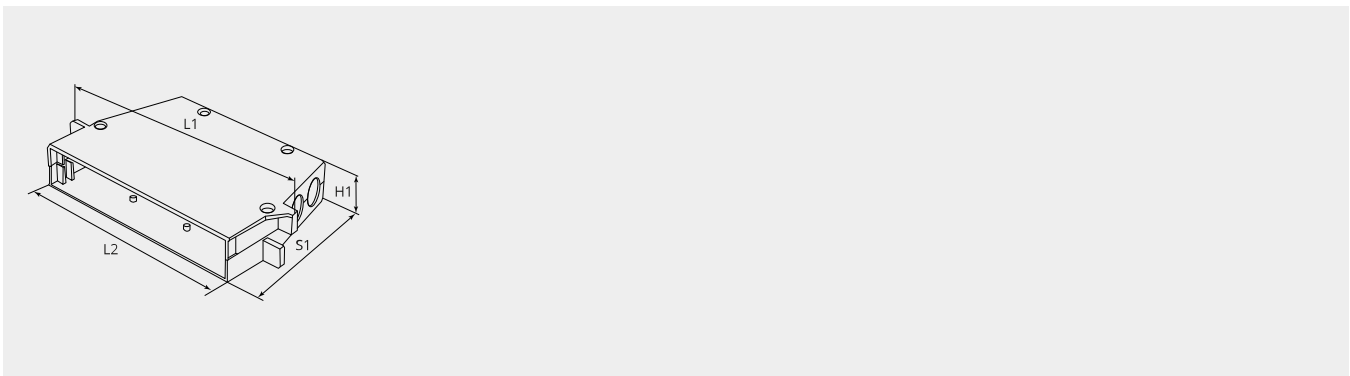

Item number	L1 (mm)	EMI
TRACF00	113.5	Yes