




Contacts

Pin contact size 16, 0.75mm²

Item number: 10-40557-075AU

Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm over 2.5µm Ni
Wire section (mm ²):	0.75
Wire section (AWG):	18
Stripping length (mm):	7.0

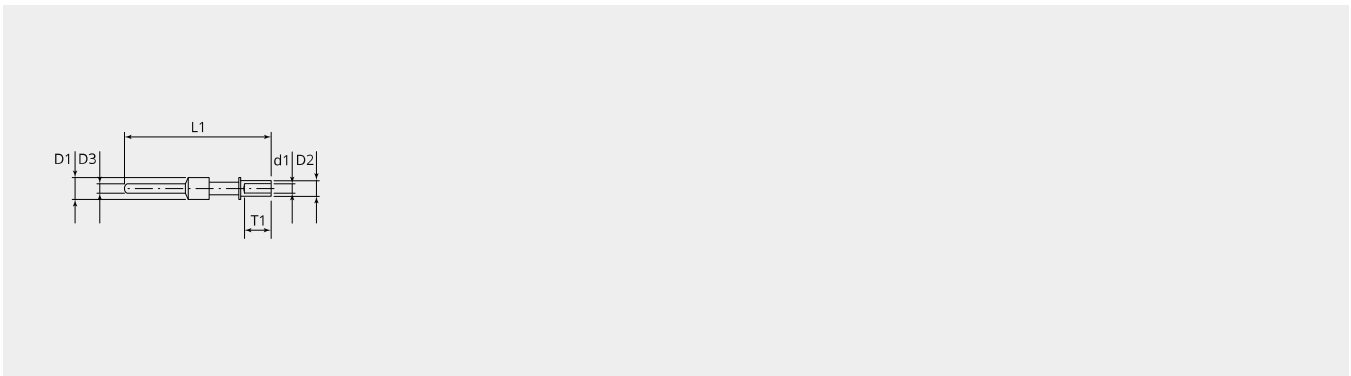

Dimensional drawing


D1 (Ø):	3.1
D2 (Ø):	2.2
D3 (Ø):	1.6
d1 (Ø):	1.35
L1 (mm):	32
T1 (mm):	6.4

Electrical properties contacts

Nominal current (A):	13
Maximal current (A):	22
Test current (A):	20

Complementary products:

Counterpart:



10-40556-075AU

Contacts

Tools:



GIM10V16-0.25-1.5

Press-head for GIW10V



GIW10V

Mechanical hand press tool GIW10



WMK0GR16-0.5-0.75

Insertion tool for contacts



WML0

Handle



WML0-STI-GR16

Extraction tool for contacts