



# 90° elbow back shell


With swivel nut for individual positioning of the wire & cable

Item number: BEN22-AC

Packing unit: 1

## Mechanical properties

Size:	22
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 $\mu$
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	non conductive
EMI:	No
Material sealing ring:	Silicone

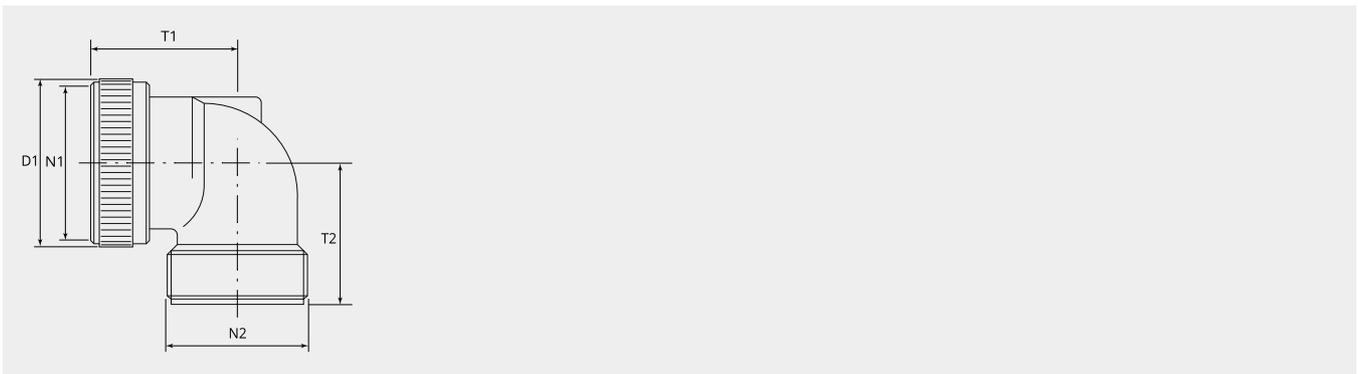

## Dimensional drawing

D1 (Ø):	37.0
N1:	1 1/4"-18 UNEF 2B
N2:	1 3/16"-18 UNEF 2A
T1 (mm):	35.5
T2 (mm):	35.0

Please contact your Gimota partner for other shell materials or surface coatings.

## Complementary products:

### Cable termination:



**CC22-AC**  
Cable clamp type C