




Backshell with groove for heatshrinkable shapes

Item number: BSH10-AA

Packing unit: 1

Mechanical properties

Size:	10SL
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

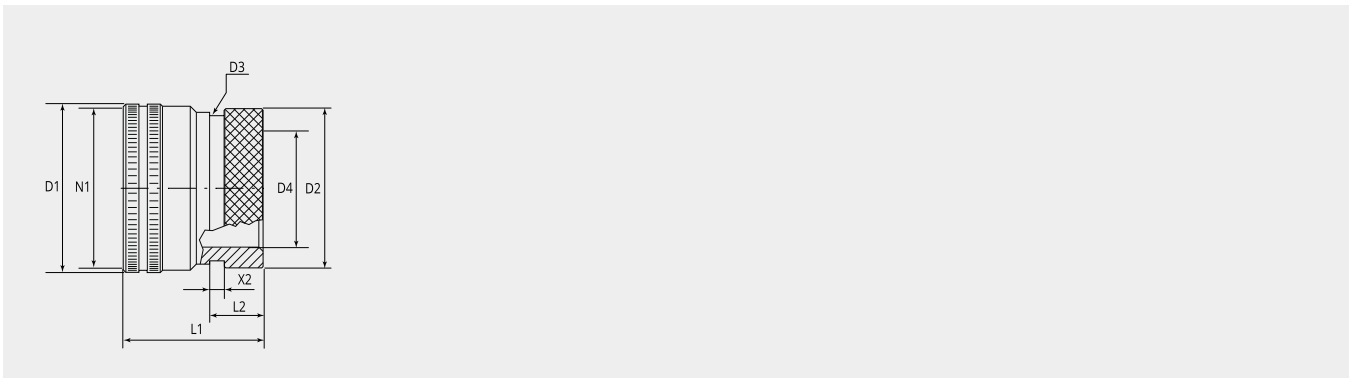

Dimensional drawing

D1 (Ø):	20.0
D2 (Ø):	15.5
D3 (Ø):	13.3
d1 (Ø):	8.0
L1 (mm):	18.0
L2 (mm):	11.7
L3 (mm):	3.5
N1:	5/8"-24 UNEF 2B

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Accessory:



FTH14-06

Heatshrinkable shape, straight, with adhesive



FTHW14-06

Heatshrinkable shape, 90°-elbow, with adhesive