




Back shell with groove for heatshrinkable shapes

Item number: BSH22-AC

Packing unit: 1

Mechanical properties

Size:	22
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 μ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	non conductive
EMI:	No
Material sealing ring:	Silicone

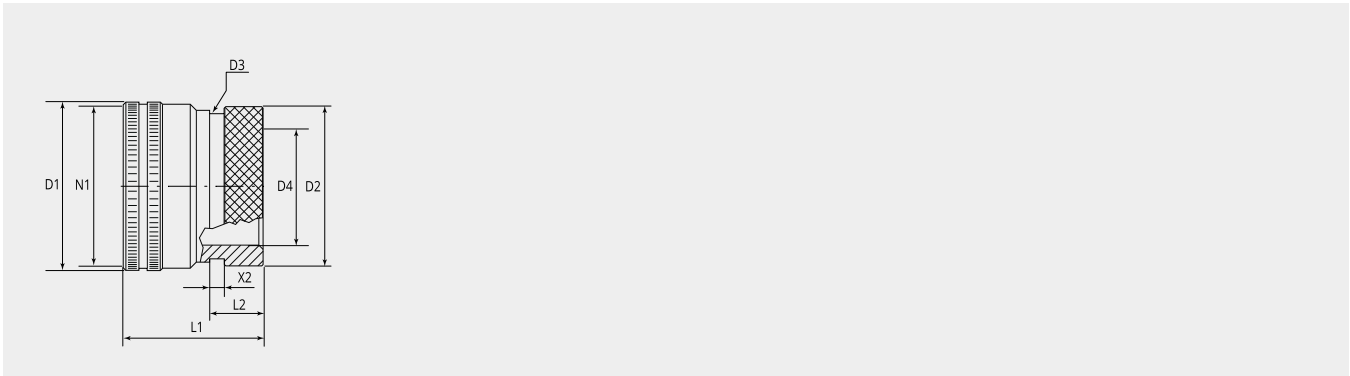

Dimensional drawing

D1 (Ø):	37.0
D2 (Ø):	29.6
D3 (Ø):	26.2
d1 (Ø):	21.0
L1 (mm):	35.0
L2 (mm):	12.4
L3 (mm):	3.5
N1:	1 1/4"-18 UNEF 2B

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Accessory:



FTH23-09
Heatshrinkable shape, straight, with adhesive



FTHW23-09
Heatshrinkable shape, 90°-elbow, with adhesive