




Back shell straight, long

Item number: BSL10-AC

Packing unit: 1

Mechanical properties

| | |
|---------------------------------|--------------------|
| Size: | 10SL |
| Shell material: | Aluminum alloy |
| Surface treatment: | Epoxy-polyurethane |
| Type of surface: | varnished |
| Thickness of surface treatment: | 13-16 μ |
| Surface colour: | black |
| Corrosion resistance (h): | 500 |
| Operation temperature: | -55°C - +125°C |
| Temperature shock: | -55°C - +125°C |
| Conductivity (M Ω): | non conductive |
| EMI: | No |
| Material sealing ring: | Silicone |

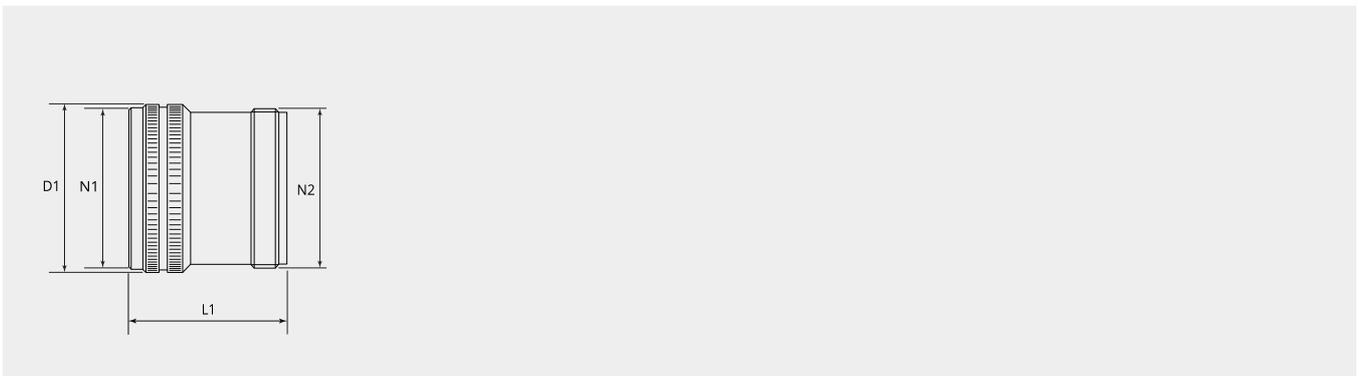

Dimensional drawing

| | |
|----------|-----------------|
| D1 (Ø): | 20.0 |
| L1 (mm): | 37.0 |
| N1: | 5/8"-24 UNEF 2B |
| N2: | 5/8"-24 UNEF 2A |

Please contact your Gimota partner for other shell materials or surface coatings.