




Backshell straight, long

Item number: BSL24-AC

Packing unit: 1

Mechanical properties

Size:	24
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 μ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	non conductive
EMI:	No
Material sealing ring:	Silicone

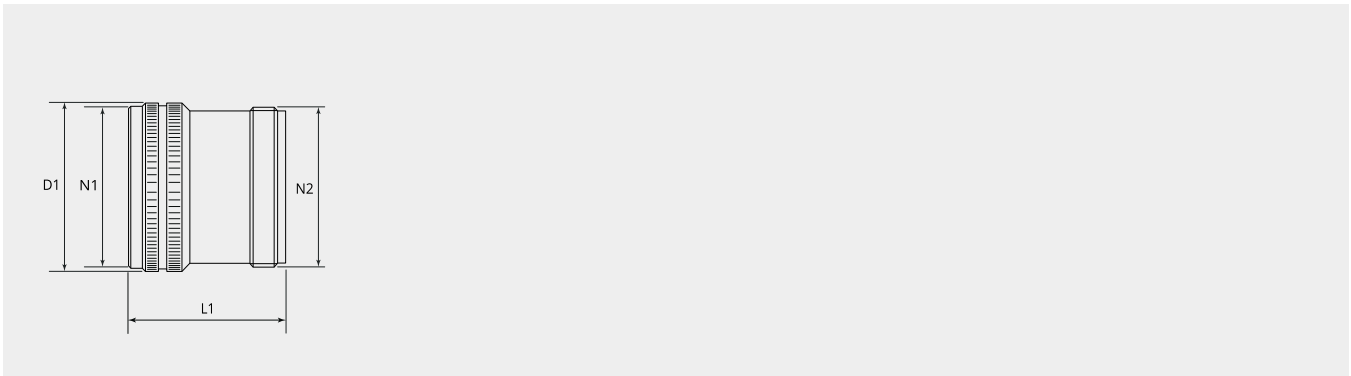

Dimensional drawing

D1 (Ø):	40.0
L1 (mm):	45.0
N1:	1 3/8"-18 UNEF 2B
N2:	1 7/16"-18 UNEF 2A

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Cable termination:



CC24-AA
Cable clamp type C



CC24-AC
Cable clamp type C