




Backshell straight, long

Item number: BSL40-AC

Packing unit: 1

Mechanical properties

| | |
|---------------------------------|--------------------|
| Size: | 40 |
| Shell material: | Aluminum alloy |
| Surface treatment: | Epoxy-polyurethane |
| Type of surface: | varnished |
| Thickness of surface treatment: | 13-16 μ |
| Surface colour: | black |
| Corrosion resistance (h): | 500 |
| Operation temperature: | -55°C - +125°C |
| Temperature shock: | -55°C - +125°C |
| Conductivity (M Ω): | non conductive |
| EMI: | No |
| Material sealing ring: | Silicone |

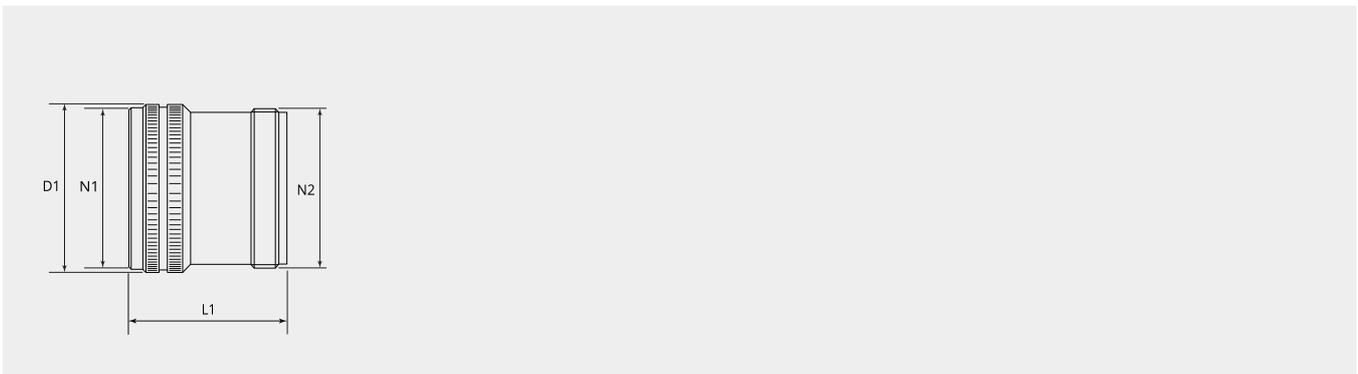

Dimensional drawing

| | |
|----------|--------------------|
| D1 (Ø): | 64.0 |
| L1 (mm): | 65.0 |
| N1: | 2 5/16"-16 UNEF 2B |
| N2: | 2 1/4"-16 UN 2A |

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Cable termination:



CC40-AA
Cable clamp type C



CC40-AC
Cable clamp type C