




# Back shell straight with internal metric thread

Item number: BSN10-M1B-AC

Packing unit: 1

## Mechanical properties

Size:	10SL
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 $\mu$
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	non conductive
EMI:	No
Material sealing ring:	Silicone

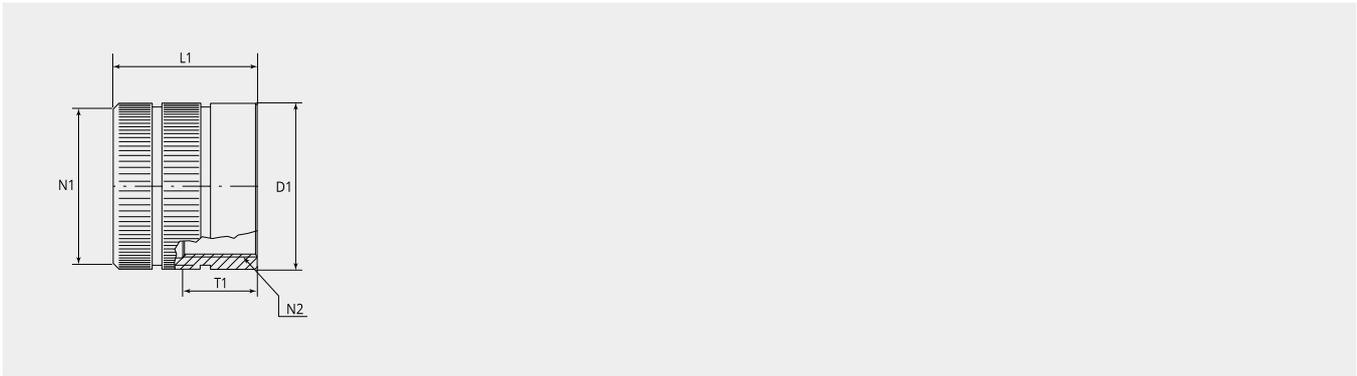

## Dimensional drawing

<b>D1 (Ø):</b>	20.0
<b>L1 (mm):</b>	32.0
<b>N1:</b>	5/8"-24 UNEF 2B
<b>N2:</b>	M12x1.5
<b>T1 (mm):</b>	9.0

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.