



# Backshell straight, standard


Item number: BSN24-AA

Net weight: 0.0272 kg

Packing unit: 1

## Mechanical properties

Size:	24
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 $\mu$
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	$\leq 0.5$
EMI:	Yes
Material sealing ring:	Silicone

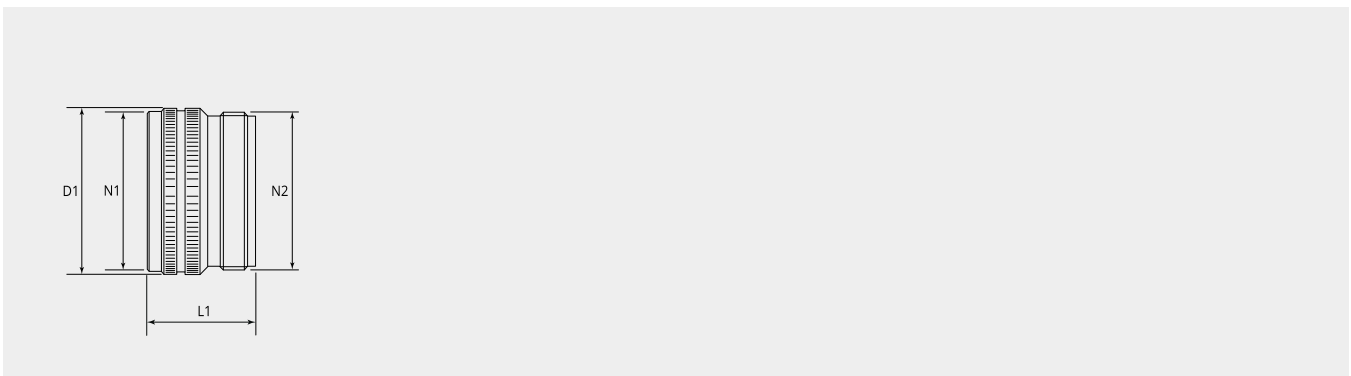

## Dimensional drawing

D1 (Ø):	40.0
L1 (mm):	30.0
N1:	1 3/8"-18 UNEF 2B
N2:	1 7/16"-18 UNEF 2A

Please contact your Gimota partner for other shell materials or surface coatings.

## Complementary products:

### Cable termination:



**CC24-AA**  
Cable clamp type C