



Back shell straight, standard


Item number: BSN40-AC

Net weight: 0.0385 kg

Packing unit: 1

Mechanical properties

Size:	40
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 μ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	non conductive
EMI:	No
Material sealing ring:	Silicone

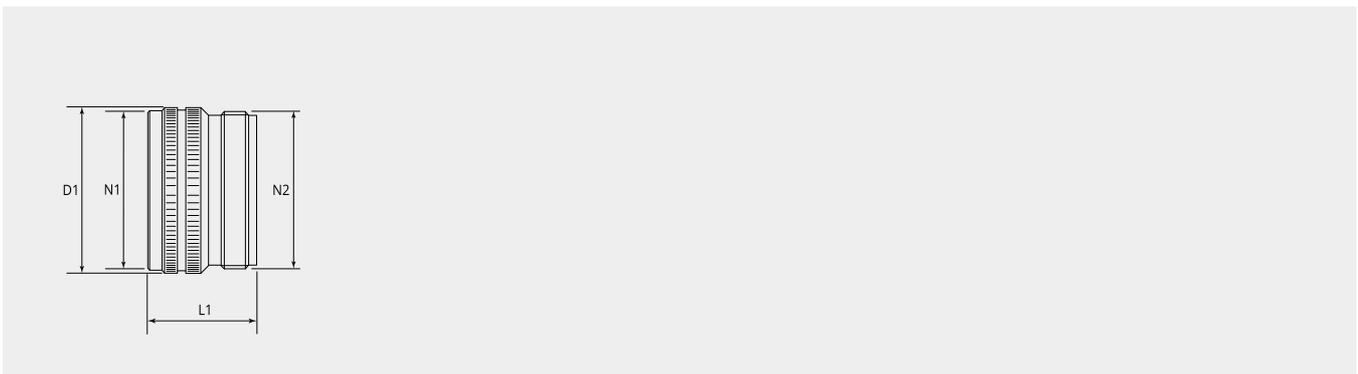

Dimensional drawing

D1 (\emptyset):	64.0
L1 (mm):	35.0
N1:	2 5/16"-16 UNEF 2B
N2:	2 1/4"-16 UNEF 2A

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Cable termination:



CC40-AC
Cable clamp type C