



# Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC14-AC

Packing unit: 1

## Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 $\mu$
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	non conductive
EMI:	No
Material sealing ring:	Silicone

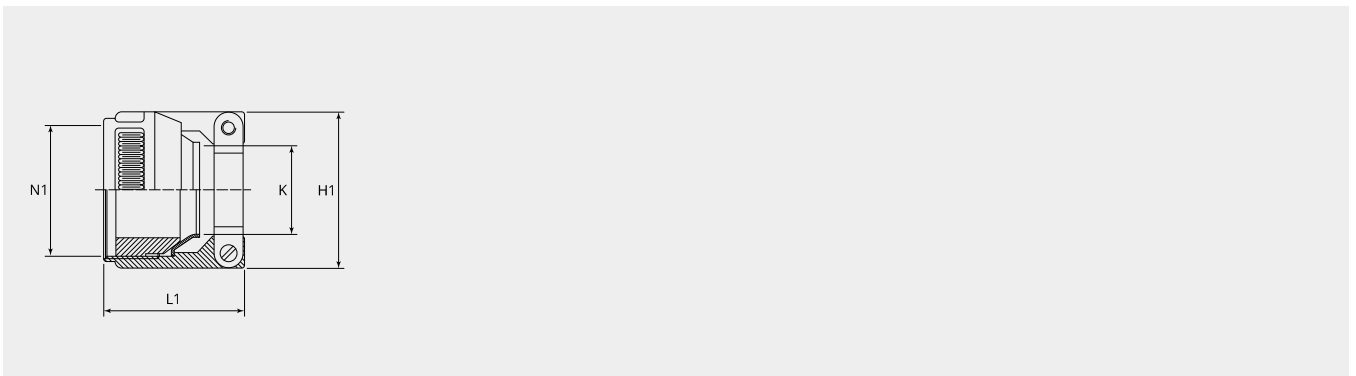

## Dimensional drawing

L1 (mm):	34.0
N1:	3/4"-20 UNEF 2B
H1 (mm):	26.0
Clamping range min. ( $\emptyset$ ):	5.8
Clamping range max. ( $\emptyset$ ):	11.0

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.