



Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC16-AC

Packing unit: 1

Mechanical properties

Size:	16
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16μ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	non conductive
EMI:	No
Material sealing ring:	Silicone

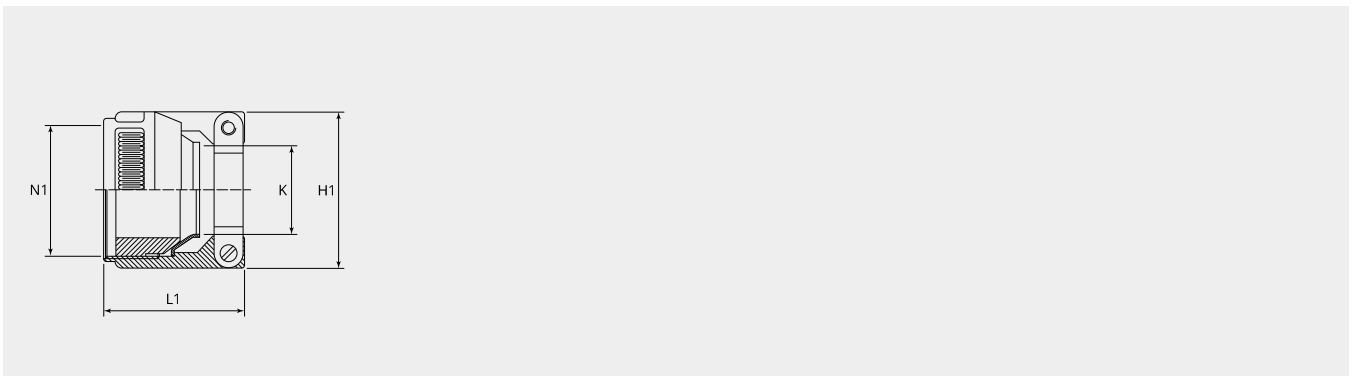

Dimensional drawing

L1 (mm):	34.0
N1:	7/8"-20 UNEF 2B
H1 (mm):	29.0
Clamping range min. (Ø):	8.0
Clamping range max. (Ø):	13.6

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.