



# Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC22-AA

Packing unit: 1

## Mechanical properties

Size:	22
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 $\mu$
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	$\leq 0.5$
EMI:	Yes
Material sealing ring:	Silicone

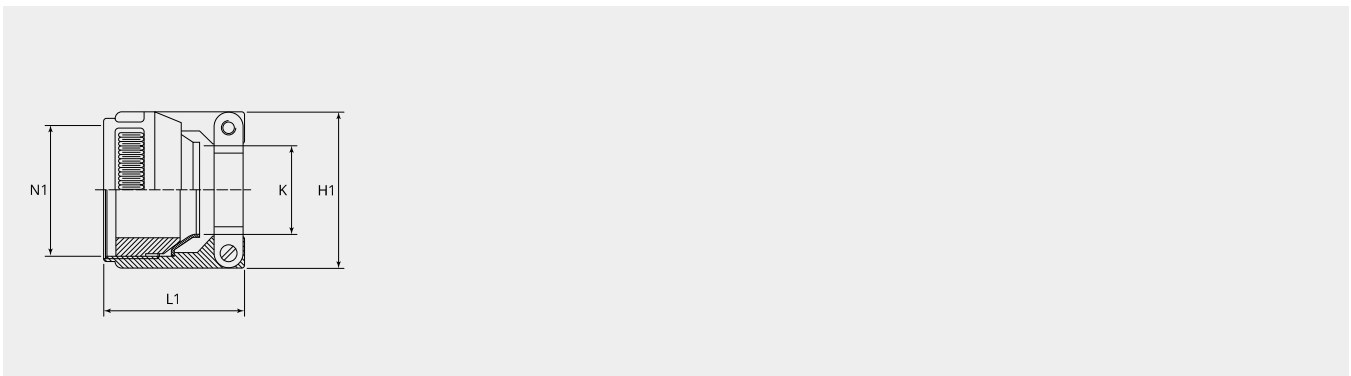

## Dimensional drawing

L1 (mm):	36.0
N1:	1 3/16"-18 UNEF 2B
H1 (mm):	38.0
Clamping range min. ( $\emptyset$ ):	11.3
Clamping range max. ( $\emptyset$ ):	19.0

Please contact your Gimota partner for other shell materials or surface coatings.