



# Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC24-AA

Packing unit: 1

## Mechanical properties

Size:	24
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 $\mu$
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	$\leq 0.5$
EMI:	Yes
Material sealing ring:	Silicone

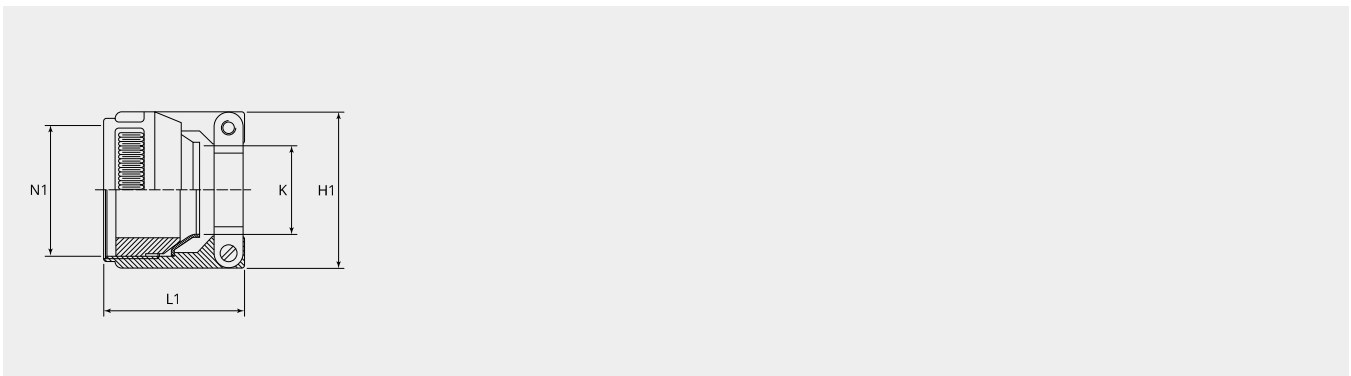

## Dimensional drawing

L1 (mm):	39.0
N1:	1 7/16"-18 UNEF 2B
H1 (mm):	44.0
Clamping range min. ( $\emptyset$ ):	15.5
Clamping range max. ( $\emptyset$ ):	23.8

Please contact your Gimota partner for other shell materials or surface coatings.