



# Cable clamp type C


## for cable entry bushing MS3420-A

Item number: CC24-AC

Packing unit: 1

### Mechanical properties

|                                 |                    |
|---------------------------------|--------------------|
| Size:                           | 24                 |
| Shell material:                 | Aluminum alloy     |
| Surface treatment:              | Epoxy-polyurethane |
| Type of surface:                | varnished          |
| Thickness of surface treatment: | 13-16 $\mu$        |
| Surface colour:                 | black              |
| Corrosion resistance (h):       | 500                |
| Operation temperature:          | -55°C - +125°C     |
| Temperature shock:              | -55°C - +125°C     |
| Conductivity (M $\Omega$ ):     | non conductive     |
| EMI:                            | No                 |
| Material sealing ring:          | Silicone           |

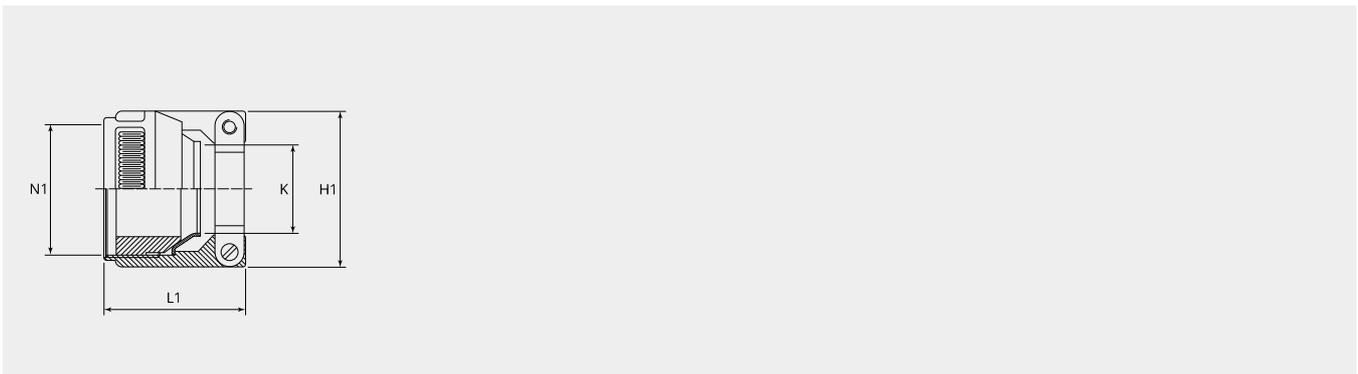

### Dimensional drawing

|                                      |                    |
|--------------------------------------|--------------------|
| L1 (mm):                             | 39.0               |
| N1:                                  | 1 7/16"-18 UNEF 2B |
| H1 (mm):                             | 44.0               |
| Clamping range min. ( $\emptyset$ ): | 15.5               |
| Clamping range max. ( $\emptyset$ ): | 23.8               |

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.