



Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC24-AC

Packing unit: 1

Mechanical properties

Size:	24
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16 μ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	non conductive
EMI:	No
Material sealing ring:	Silicone

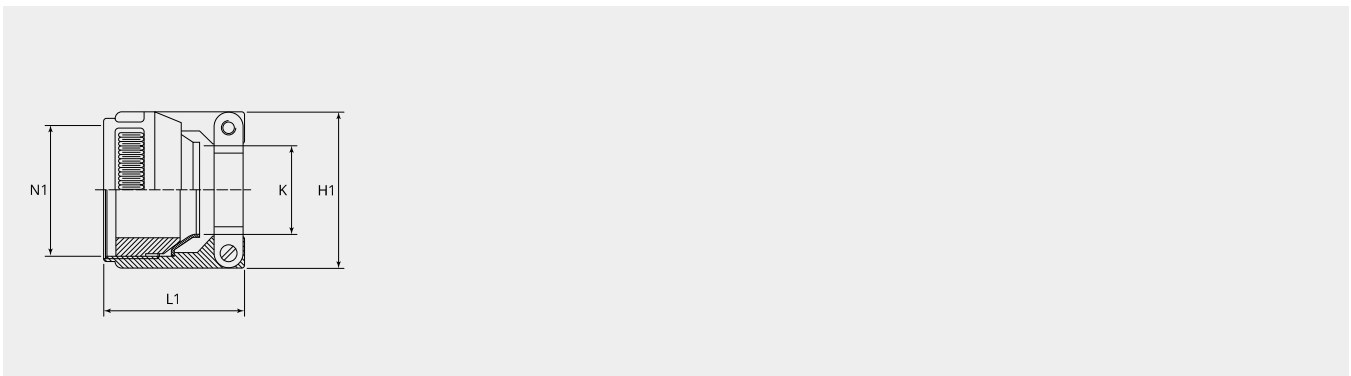

Dimensional drawing

L1 (mm):	39.0
N1:	1 7/16"-18 UNEF 2B
H1 (mm):	44.0
Clamping range min. (\emptyset):	15.5
Clamping range max. (\emptyset):	23.8

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.