



Cable clamp type C


for cable entry bushing MS3420-A

Item number: CC28-AA

Packing unit: 1

Mechanical properties

Size:	28
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 μ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

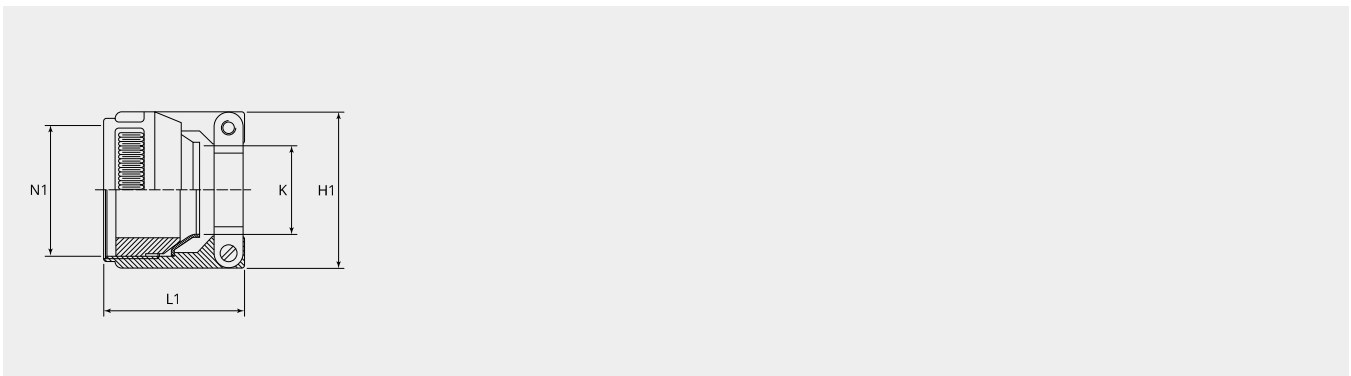

Dimensional drawing

L1 (mm):	39.0
N1:	1 7/16"-18 UNEF 2B
H1 (mm):	44.0
Clamping range min. (\emptyset):	15.5
Clamping range max. (\emptyset):	23.8

Please contact your Gimota partner for other shell materials or surface coatings.