



EMI adapter with shielding sleeve

For cable-Ø ≤5mm


Item number: EC-14-05-AE

Net weight: 0.0133 kg

Packing unit: 1

Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Electroless nickel
Thickness of surface treatment:	12-15µ
Surface colour:	blank
Corrosion resistance (h):	48
Operation temperature:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

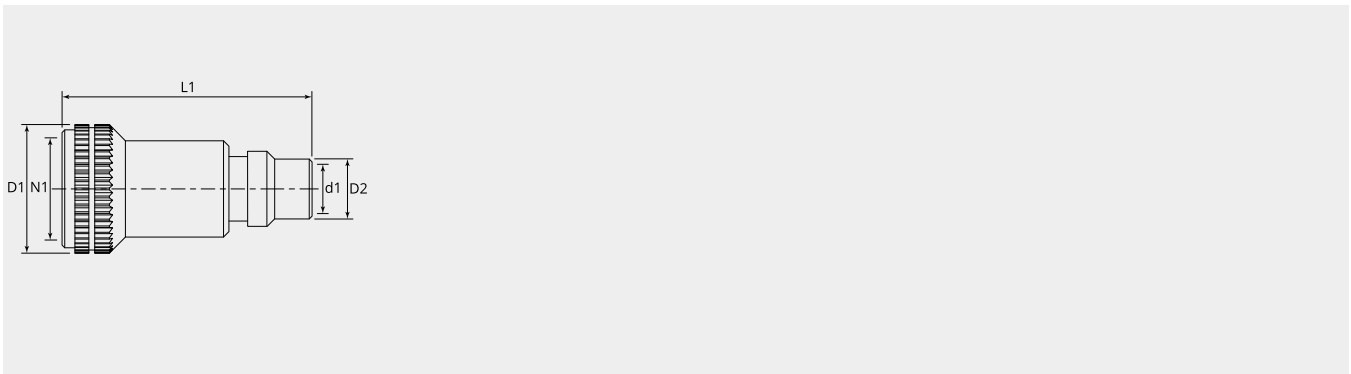

Dimensional drawing

D1 (Ø):	24.0
D2 (Ø):	6.8
d1 (Ø):	5.2
L1 (mm):	46.6
N1:	3/4"-20 UNEF 2B

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.


Complementary products:

Accessory:



FTH08-04

Heatshrinkable shape, straight, with adhesive



SUGSC297

Shielding sleeve suitable for

Tools:



GIM30K06

Die to GIW30L



GIW30L

Mechanical hand press tool GIW30L