



EMI adapter with shielding sleeve


For cable- $\varnothing \leq 5\text{mm}$

Item number: EC-14-06-AE

Packing unit: 1

Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Electroless nickel
Thickness of surface treatment:	12-15 μ
Surface colour:	blank
Corrosion resistance (h):	48
Operation temperature:	-55°C - +125°C
Conductivity (M Ω):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

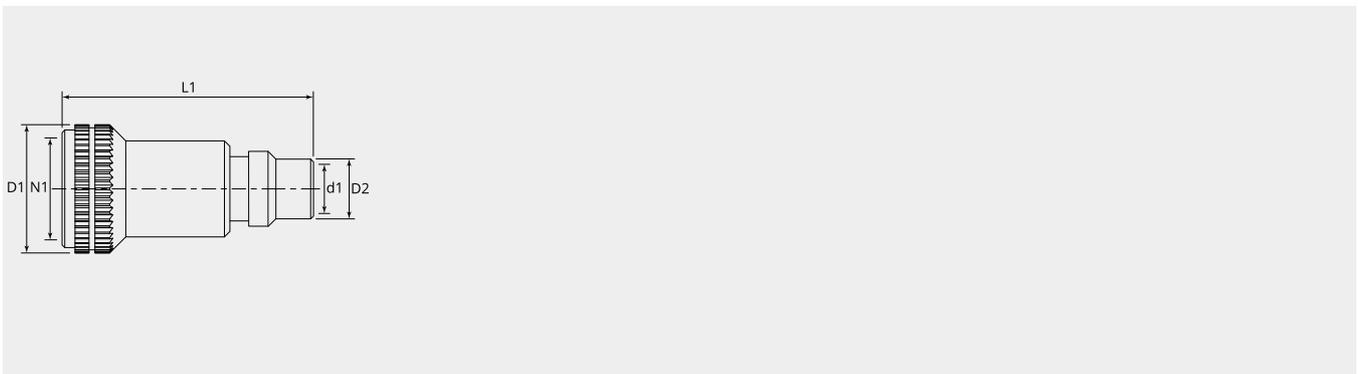

Dimensional drawing

D1 (\varnothing):	24.0
D2 (\varnothing):	7.8
d1 (\varnothing):	6.2
L1 (mm):	46.6
N1:	3/4"-20 UNEF 2B

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Complementary products:

Accessory:

**FTH08-04**

Heatshrinkable shape, straight, with adhesive

**SUGSC297**

Shielding sleeve suitable for

Tools:

**GIM30K06**

Die to GIW30L

**GIW30L**

Mechanical hand press tool GIW30L