




EMI adapter with IRIS- spring and strain relief

Item number: EII14S-04-AA

Packing unit: 1

Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 μ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	\leq 0.5
EMI:	Yes
Material sealing ring:	Silicone

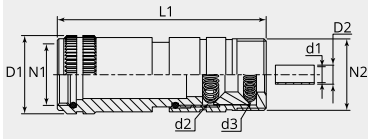

Dimensional drawing

D1 (Ø):	24.0
D2 (Ø):	6.9
d1 (Ø):	5.5
d2 (Ø):	4-7
d3 (Ø):	4-8
L1 (mm):	70
N1:	3/4"-20 UNEF 2B
N2:	7/8"-20 UNEF 2B
Clamping range min. (Ø):	4.0
Clamping range max. (Ø):	8.0

Please contact your Gimota partner for other shell materials or surface coatings.

Complementary products:

Accessory:



FTH14-06
Heatshrinkable shape, straight, with adhesive