



# EMI adapter with IRIS- spring and strain relief


Item number: EII14S-09-AA

Net weight: 0.0413 kg

Packing unit: 1

## Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15 $\mu$
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M $\Omega$ ):	$\leq 0.5$
EMI:	Yes
Material sealing ring:	Silicone

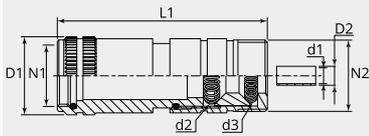

## Dimensional drawing

<b>D1 (Ø):</b>	24.0
<b>D2 (Ø):</b>	6.9
<b>d1 (Ø):</b>	5.5
<b>d2 (Ø):</b>	4-7
<b>d3 (Ø):</b>	8.5-13.5
<b>L1 (mm):</b>	70
<b>N1:</b>	3/4"-20 UNEF 2B
<b>N2:</b>	7/8"-20 UNEF 2B
<b>Clamping range min. (Ø):</b>	8.5
<b>Clamping range max. (Ø):</b>	13.5

Please contact your Gimota partner for other shell materials or surface coatings.

## Complementary products:

### Accessory:



#### **FTH14-06**

Heatshrinkable shape, straight, with adhesive