




# EMI adapter with cone ring, for heatshrinkable shape

Item number: ET-14-02-AA

Packing unit: 1

## Mechanical properties

Size:	14S
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

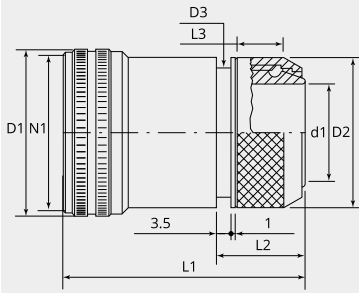

## Dimensional drawing

<b>D1 (Ø):</b>	24.0
<b>D2 (Ø):</b>	18.5
<b>D3 (Ø):</b>	16.3
<b>d1 (Ø):</b>	8.6
<b>L1 (mm):</b>	53.0
<b>L2 (mm):</b>	18.0
<b>L3 (mm):</b>	10.0
<b>N1:</b>	3/4"-20 UNEF 2B
<b>T1 (mm):</b>	3.5

Please contact your Gimota partner for other shell materials or surface coatings.