




EMI adapter with cone ring, for heatshrinkable shape

Item number: ET-24-07-AA

Packing unit: 1

Mechanical properties

Size:	24
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

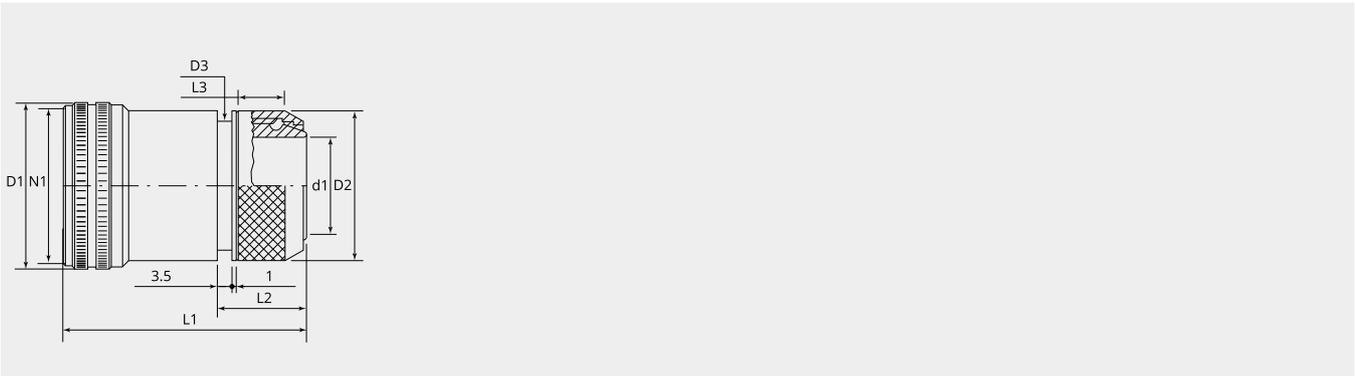

Dimensional drawing

D1 (Ø):	40.0
D2 (Ø):	38.0
D3 (Ø):	34.5
d1 (Ø):	24.6
L1 (mm):	58.0
L2 (mm):	20.8
L3 (mm):	12.0
N1:	1 3/8"-18 UNEF 2B
T1 (mm):	3.5

Please contact your Gimota partner for other shell materials or surface coatings.