




# EMI adapter with cone ring, for heatshrinkable shape

Item number: ET-32-10-AA

Packing unit: 1

## Mechanical properties

Size:	32
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

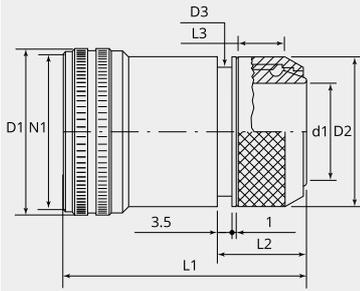

## Dimensional drawing

<b>D1 (Ø):</b>	52.0
<b>D2 (Ø):</b>	48.0
<b>D3 (Ø):</b>	44.0
<b>d1 (Ø):</b>	33.3
<b>L1 (mm):</b>	60.0
<b>L2 (mm):</b>	20.7
<b>L3 (mm):</b>	12.0
<b>N1:</b>	1 7/8"-16 UNEF 2B
<b>T1 (mm):</b>	3.5

Please contact your Gimota partner for other shell materials or surface coatings.