




EMI adapter with cone ring, for heatshrinkable shape

Item number: ET-40-14-AA

Packing unit: 1

Mechanical properties

Size:	40
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	10-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

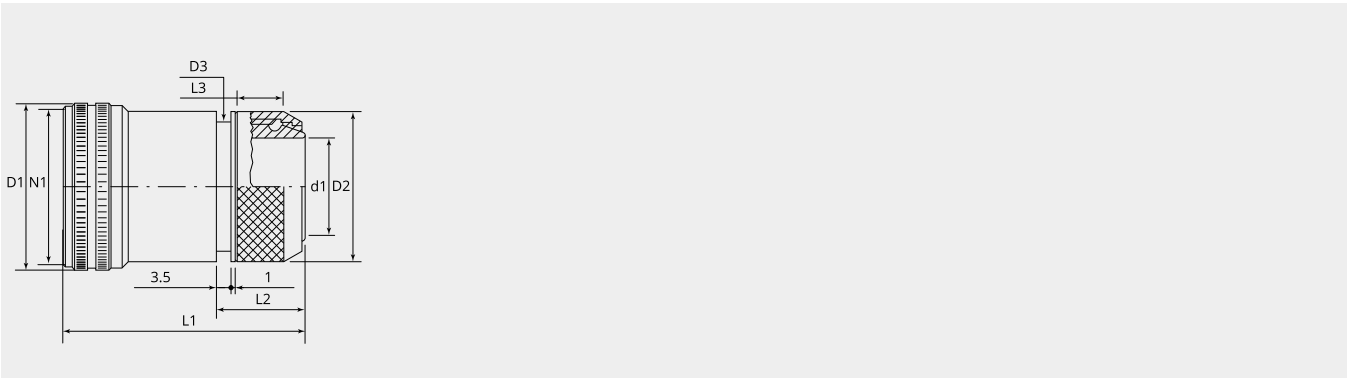

Dimensional drawing

D1 (Ø):	64.0
D2 (Ø):	62.0
D3 (Ø):	58.0
d1 (Ø):	46.0
L1 (mm):	61.0
L2 (mm):	21.8
L3 (mm):	12.0
N1:	2 5/16"-16 UNEF 2B
T1 (mm):	3.5

Please contact your Gimota partner for other shell materials or surface coatings.