



Cable receptacle

Series GR

Item number: GR11-14S-2PN-EAA


Packing unit: 1

Mechanical properties

Size:	14S
Contact type:	Pin
Coding options:	2
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	12-15 μ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (M Ω):	\leq 0.5
EMI:	Yes
Coupling-torque to lock (Nm):	max. 1.8
Coupling-torque to open (Nm):	min. 0.55

Thermal properties

Material contact insert:	Ethylene acrylate GXF
Operating temperature:	-55°C - +150°C
Fire protection class DIN EN 45545-2:	R23/HL3

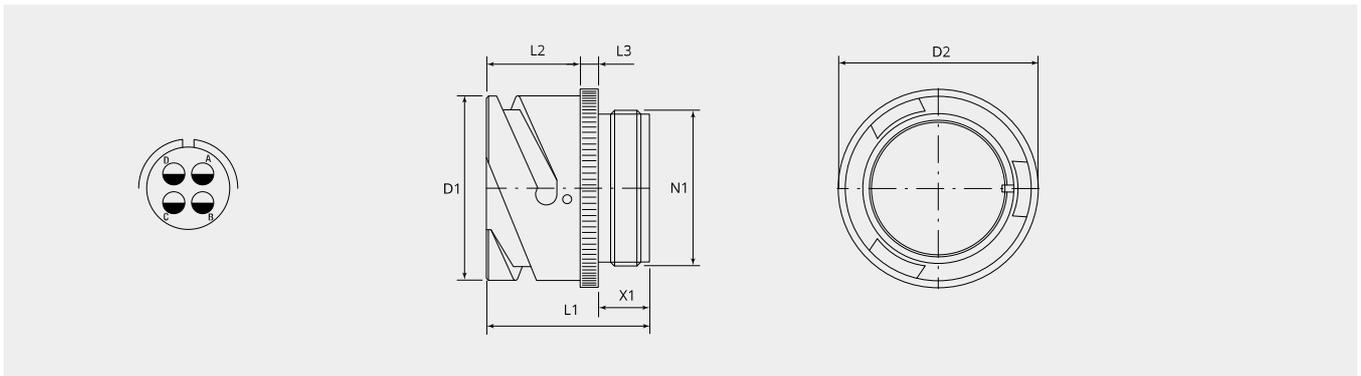

Dimensional drawing

D1 (Ø):	24.6
D2 (Ø):	29.0
L1 (mm):	25.0
L2 (mm):	14.2
L3 (mm):	3.2
N1:	3/4"-20 UNEF 2A
X1 (mm):	9.0

Electrical properties

Operating voltage DC (V):	250
Operating voltage AC (V):	200
Test voltage AC (V):	1000
Insulation resistance (Ω m):	≥ 5000
Insulation creepage distance (mm):	≥ 1.6
Voltage class:	MIL-DTL-5015

Electrical properties contacts

Size 16S - nominal current (A):	13
Size 16S - maximal current (A):	22
Size 16S - test current (A):	20

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Voltage classes tested acc. MIL-DTL-5015
 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
 Corrosion resistance tested acc. MIL 1344A Test 101.1
 Temperature shock tested acc. MIL 202F, 107G Method
 Electrical conductivity acc. MIL 1344A, Test 3007

Complementary products:

Counterpart:

**GR60-14S-2SN-EAA**

Plug with bayonet coupling nut

**GR601-14S-2SN-EAA**

Plug with bayonet coupling nut, for EMI applications

Backshell:

**BEN14-AA**

90° elbow backshell

**BEN14-M2B-AA**

90° elbow backshell with internal metric thread

**BSL14-AA**

Backshell straight, long

**BSN14-AA**

Backshell straight, standard

**BSN14-M2B-AA**

Backshell straight with internal metric thread

**BST14-AC**

Termination back shell type R for grommets

**ET-14-02-AA**

EMI adapter with cone ring, for heatshrinkable shape

**ET-14-03-AA**

EMI adapter with cone ring, for heatshrinkable shape

Contacts:

**10-40553-05AU**

Pin contact size 16S, 0.25 - 0.5mm²

**10-40553AU**

Pin contact size 16S, 0.75 - 1.5mm²

Filler plugs:**10-101033-121**

Filler plug, size 16/16S

Protection cap:**PR14S-AC**

Metallic protection cap to bayonet receptacle (GB,GR & GS)

**PR14S-D**

Plastic protection cap to bayonet receptacles (GB, GR &GS)