



# Plug with bayonet coupling nut

## Series GS

Item number: GS60-18-9PN-EAA


Packing unit: 1

## Mechanical properties

|                                 |                |
|---------------------------------|----------------|
| Size:                           | 18             |
| Contact type:                   | Pin            |
| Coding options:                 | 4              |
| Number of contacts, size 12:    | 2              |
| Number of contacts, size 16:    | 5              |
| Shell material:                 | Aluminum alloy |
| Surface treatment:              | Zinc           |
| Type of surface:                | passivated     |
| Thickness of surface treatment: | 12-15µ         |
| Surface colour:                 | black          |
| Corrosion resistance (h):       | 200            |
| Operation temperature:          | -55°C - +90°C  |
| Temperature shock:              | -55°C - +125°C |
| Conductivity (MΩ):              | ≤ 0.5          |
| Coupling-torque to lock (Nm):   | max. 4.0       |
| Coupling-torque to open (Nm):   | min. 1.0       |

## Thermal properties

|                                       |                       |
|---------------------------------------|-----------------------|
| Material contact insert:              | Ethylene acrylate GXF |
| Operating temperature:                | -55°C - +150°C        |
| Fire protection class DIN EN 45545-2: | R23/HL3               |

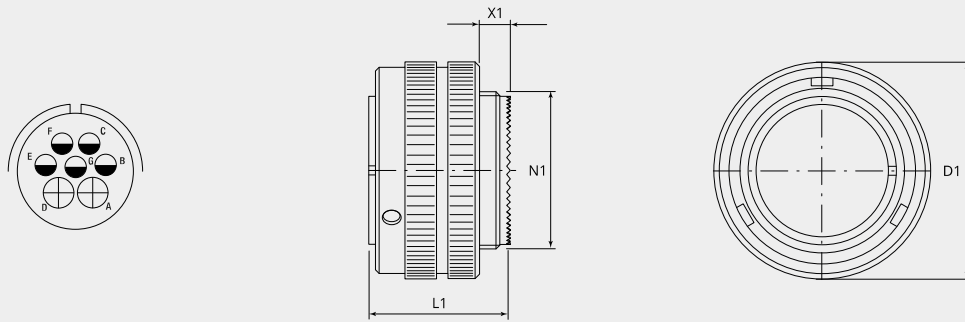

## Dimensional drawing

|                 |               |
|-----------------|---------------|
| <b>D1 (Ø):</b>  | 37.0          |
| <b>L1 (mm):</b> | 36.0          |
| <b>N1:</b>      | 1"-20 UNEF 2A |
| <b>X1 (mm):</b> | 9.0           |

## Electrical properties

|                                           |              |
|-------------------------------------------|--------------|
| <b>Operating voltage DC (V):</b>          | 250          |
| <b>Operating voltage AC (V):</b>          | 200          |
| <b>Test voltage AC (V):</b>               | 1000         |
| <b>Insulation resistance (Ω m):</b>       | ≥ 5000       |
| <b>Insulation creepage distance (mm):</b> | ≥ 1.6        |
| <b>Voltage class:</b>                     | MIL-DTL-5015 |

## Electrical properties contacts

|                                                    |    |
|----------------------------------------------------|----|
| <b>Size 12 - nominal current (A):</b>              | 23 |
| <b>Size 12 - maximal current (A):</b>              | 41 |
| <b>Size 12 - test current (A):</b>                 | 35 |
| <b>Size 16 - nominal current [continuous] (A):</b> | 13 |
| <b>Size 16 - maximal current [short-term] (A):</b> | 22 |
| <b>Size 16 - test current (A):</b>                 | 20 |

**Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.**

Voltage classes tested acc. MIL-DTL-5015

Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37

Corrosion resistance tested acc. MIL 1344A Test 101.1

Temperature shock tested acc. MIL 202F, 107G Method

Electrical conductivity acc. MIL 1344A, Test 3007