



Plug with rubber coated coupling nut, for EMI applications

Series GS

Item number: GS604-18-9SN-EAA


Packing unit: 1

Mechanical properties

Size:	18
Contact type:	Socket
Coding options:	4
Number of contacts, size 12:	2
Number of contacts, size 16:	5
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	12-15μ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Coupling-torque to lock (Nm):	max. 4.0
Coupling-torque to open (Nm):	min. 1.0

Thermal properties

Material contact insert:	Ethylene acrylate GXF
Operating temperature:	-55°C - +150°C
Fire protection class DIN EN 45545-2:	R23/HL3

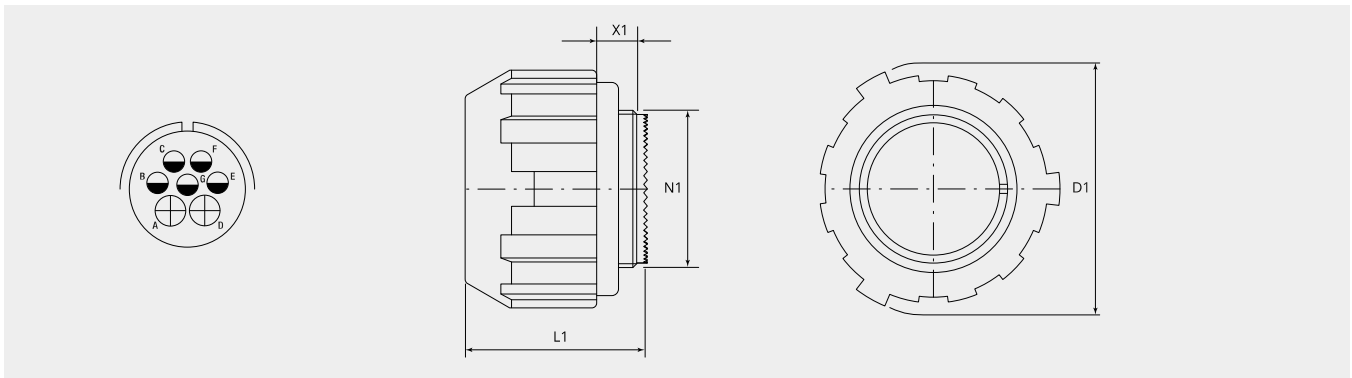

Dimensional drawing

D1 (Ø):	49.0
L1 (mm):	39.0
N1:	1"-20 UNEF 2A
X1 (mm):	9.0

Electrical properties

Operating voltage DC (V):	250
Operating voltage AC (V):	200
Test voltage AC (V):	1000
Insulation resistance (Ω m):	≥ 5000
Insulation creepage distance (mm):	≥ 1.6
Voltage class:	MIL-DTL-5015

Electrical properties contacts

Size 12 - nominal current (A):	23
Size 12 - maximal current (A):	41
Size 12 - test current (A):	35
Size 16 - nominal current [continuous] (A):	13
Size 16 - maximal current [short-term] (A):	22
Size 16 - test current (A):	20

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Voltage classes tested acc. MIL-DTL-5015

Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37

Corrosion resistance tested acc. MIL 1344A Test 101.1

Temperature shock tested acc. MIL 202F, 107G Method

Electrical conductivity acc. MIL 1344A, Test 3007

Complementary products:

Counterpart:



GS11-18-9PN-EAA

Cable receptacle



GS321-18-9PN-EAA

Receptacle with flange



GS72-18-9PN-EAA

Jam nut receptacle

Backshell:



BEN18-AA

90° elbow backshell



BEN18-M3B-AA

90° elbow backshell with internal metric thread




BSH18-AA

Backshell with groove for heatshrinkable shapes



BSL18-AA

Backshell straight, long



BSN18-AA

Backshell straight, standard




BSN18-M3B-AA

Backshell straight with internal metric thread



BSR18-16-AA

Reducer backshell



BST18-AA

Termination back shell typ R for grommet



ET-18-04-AA

EMI adapter with cone ring, for heatshrinkable shape

Contacts:



10-40556-05AU

Socket contact size 16, 0.25 - 0.5mm²



10-40556-075AU

Socket contact size 16, 0.75mm²




10-40556-20-1AU

Socket contact size 16, 1.5mm²



10-40556AU

Socket contact size 16, 1.0mm²



10-40560-11AU

Socket contact size 12, 0.5mm²



10-40560-15AU

Socket contact size 12, 0.75 - 1.0mm²




10-40560-18AU

Socket contact size 12, 1.5mm²




10-40560-22AU

Socket contact size 12, 2.5mm²



10-40560-30AU


Socket contact size 12, 4.0mm²



10-40560-38AU


Socket contact size 12, 6.0mm²

Filler plugs:



10-101033-121

Filler plug, size 16/16S



10-101033-131

Filler plug, size 12

Protection cap:



PP18-AA

Metallic protection cap to bayonet plug (GB, GR & GS)



PP18-D

Plastic protection cap to bayonet plugs (GB, GR & GS)