



Jam nut receptacle

Series GS

Item number: GS72-40-A60PN-EAA

Packing unit: 1

Jam nut receptacle, with accessory thread These receptacles correspond to the standards MIL-DTL-5015 and VG95234. They can be used for both indoor and outdoor applications.

Depending on the backshell used watertightness of up to IP69K can be achieved for the connection. The receptacles have been tested for outdoor use according to IEC EN 60529 IP65 / IP67 / IP68 (5bar) and according to DIN 40050 and IP69K.

For outdoor applications a back shell with sealed cable clamp or with an adapter for heat shrinkable shapes is required.

The main properties of these railway-fit receptacles are, in brief: Bayonet coupling | Inserts up to 105 contacts | Cross sections from 0.5 to 50 mm² | Resistant against fuels, greas- and insulating oils etc. | High mechanical loading capacity

Mechanical properties


Size:	40
Contact type:	Pin
Coding options:	4
Number of contacts, size 16:	60
Shell material:	Aluminum alloy
Surface treatment:	Zinc
Type of surface:	passivated
Thickness of surface treatment:	12-15µ
Surface colour:	black
Corrosion resistance (h):	200
Operation temperature:	-55°C - +90°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Coupling-torque to lock (Nm):	max. 10.0
Coupling-torque to open (Nm):	min. 5.9

Thermal properties

Material contact insert: Ethylene acrylate GXF

Operating temperature: -55°C - +150°C

Fire protection class DIN EN 45545-2: R23/HL3

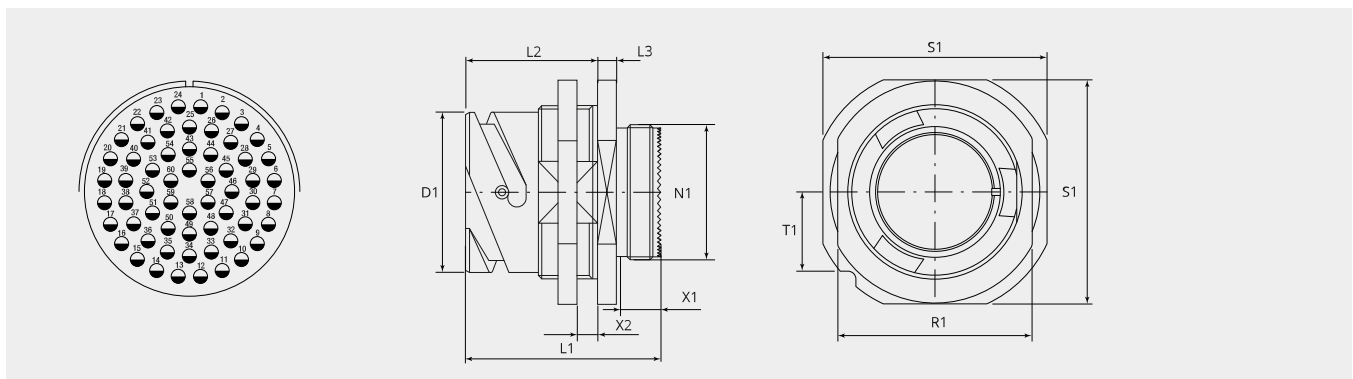

Dimensional drawing

D1 (Ø):	66.0
L1 (mm):	62.0
L2 (mm):	35.2
L3 (mm):	5.6
N1:	2 5/16"-16 UN 2A
T1 (mm):	29.6
X1 (mm):	11.3
X2 (mm):	2.4 - 8.3
S1 (mm):	83.5
R1 (mm):	75.0

Electrical properties

Operating voltage DC (V):	700
Operating voltage AC (V):	500
Test voltage AC (V):	2000
Insulation resistance (Ω m):	≥ 5000
Insulation creepage distance (mm):	≥ 3.2
Voltage class:	MIL-DTL-5015

Electrical properties contacts

Size 16 - nominal current [continuous] (A):	13
Size 16 - maximal current [short-term] (A):	22
Size 16 - test current (A):	20

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Voltage classes tested acc. MIL-DTL-5015

Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37

Corrosion resistance tested acc. MIL 1344A Test 101.1

Temperature shock tested acc. MIL 202F, 107G Method

Electrical conductivity acc. MIL 1344A, Test 3007

Complementary products:

Counterpart:



GS60-40-A60SN-EAA

Plug with bayonet coupling nut



GS601-40-A60SN-EAA

Plug with bayonet coupling nut, for EMI applications



GS602-40-A60SN-EAA

Plug with rubber coated coupling nut



GS604-40-A60SN-EAA

Plug with rubber coated coupling nut, for EMI applications

Backshell:



BEN40-AA

90° elbow backshell



BEN40-M7B-AA

90° elbow backshell with internal metric thread




BSH40-AA

Backshell with groove for heatshrinkable shapes



BSL40-AA

Backshell straight, long



BSN40-AA

Backshell straight, standard



BSN40-M7B-AA

Backshell straight with internal metric thread




BSR40-32-AA

Reducer backshell



BSR40-36-AA

Reducer backshell



BST40-AA

Termination back shell typ R for grommet



ET-40-14-AA

EMI adapter with cone ring, for heatshrinkable shape

Cable termination:



10-350349K-403

Synthetic cable clamp



10-350349K-4040


Synthetic cable clamp

Contacts:



10-40557-05AU

Pin contact size 16, 0.25 -0.5mm²



10-40557-075AU

Pin contact size 16, 0.75mm²



10-40557-20-1AU


Pin contact size 16, 1.5mm²



10-40557AU

Pin contact size 16, 1.0mm²

Filler plugs:



10-101033-121

Filler plug, size 16/16S

Protection cap:



PR40-AA-GR

Metallic protection cap to bayonet receptacle (GR & GS)



PR40-D

Plastic protection cap to bayonet receptacles (GB, GR & GS)