

# GTM12 contacts


Pin contact - 100 pcs.

Item number: GTM12PC20AU.100

Net weight: 0.0205 kg

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.4µm over Ni
Wire section (mm <sup>2</sup> ):	0.34 - 0.5
Wire section (AWG):	22 - 20
Operating temperature:	-55°C - +85°C

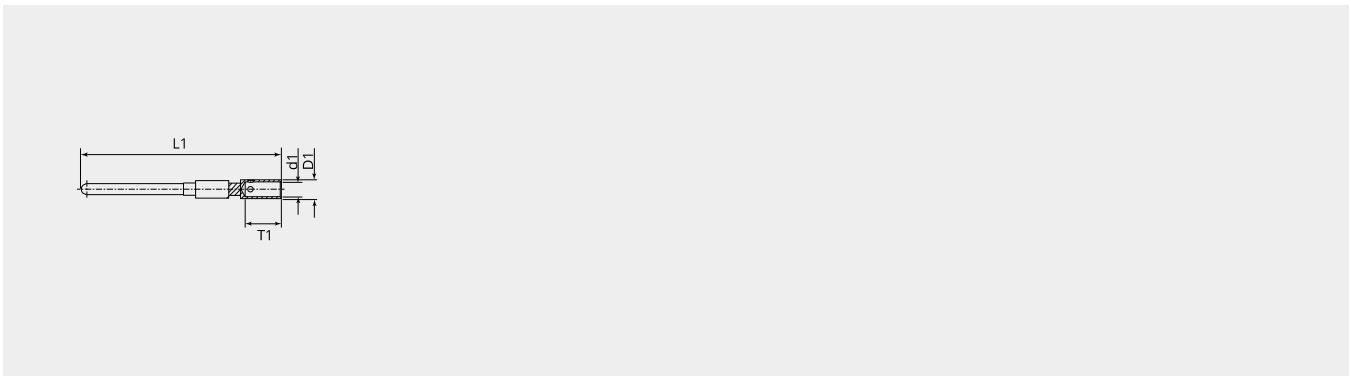

## Dimensional drawing

D1 (Ø):	1.65
d1 (Ø):	1.1
L1 (mm):	17.0
T1 (mm):	3.8