



# GTM12 contacts


Pin contact - 20 pcs.

Item number: GTM12PC23AU.20

Packing unit: 1

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.4µm over Ni
Wire section (mm <sup>2</sup> ):	0.14 - 0.2
Wire section (AWG):	26 - 24
Operating temperature:	-55°C - +85°C

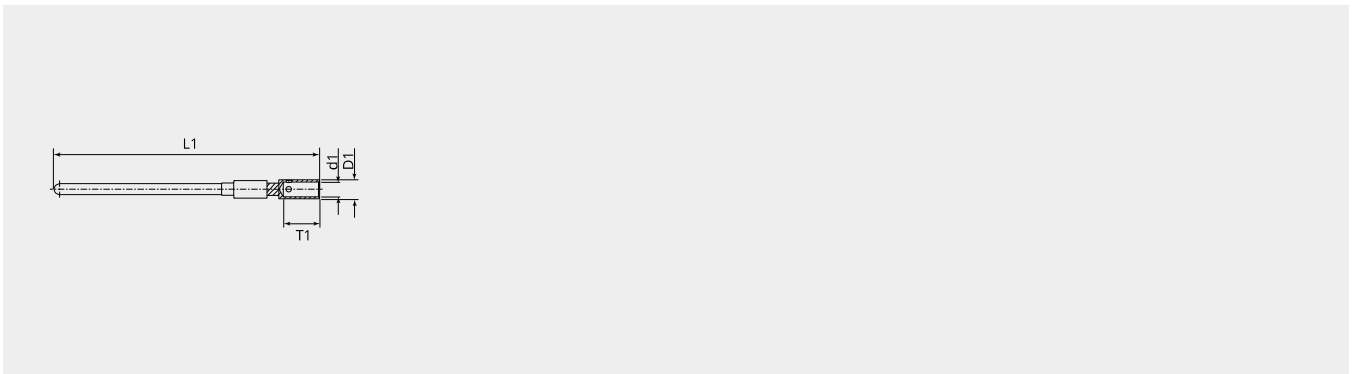

## Dimensional drawing

D1 (Ø):	1.4
d1 (Ø):	0.65
L1 (mm):	21.8
T1 (mm):	3.0