




GTM12 contacts

Pin contact - 20 pcs.

Item number: GTM12PC24AU.20

Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.4µm over Ni
Wire section (mm ²):	0.2
Wire section (AWG):	24
Operating temperature:	-55°C - +85°C

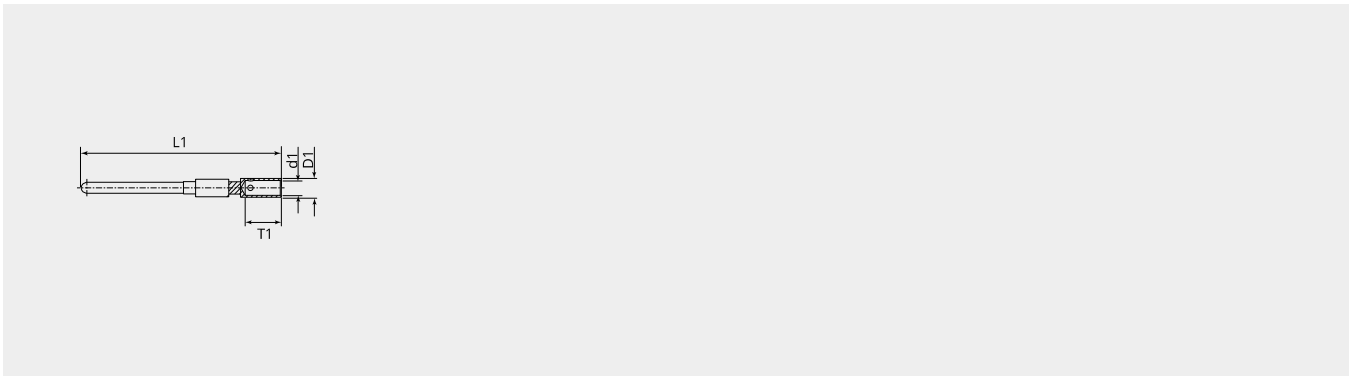

Dimensional drawing

D1 (Ø):	1.3
d1 (Ø):	0.8
L1 (mm):	17.0
T1 (mm):	6