



GTM12 contacts


Socket contact - 20 pcs.

Item number: GTM12SC20AU.20

Net weight: 0.0002 kg

Mechanical properties contacts

| | |
|----------------------------------|----------------------------|
| Contact type: | Socket |
| Strand/wire adaptation: | Crimp |
| Number of mating cycles (min.): | 200 |
| Contact Material: | CU alloy |
| Protective layer: | Gold plated, 0.4µm over Ni |
| Wire section (mm ²): | 0.34 - 0.5 |
| Wire section (AWG): | 22 - 20 |
| Operating temperature: | -55°C - +85°C |

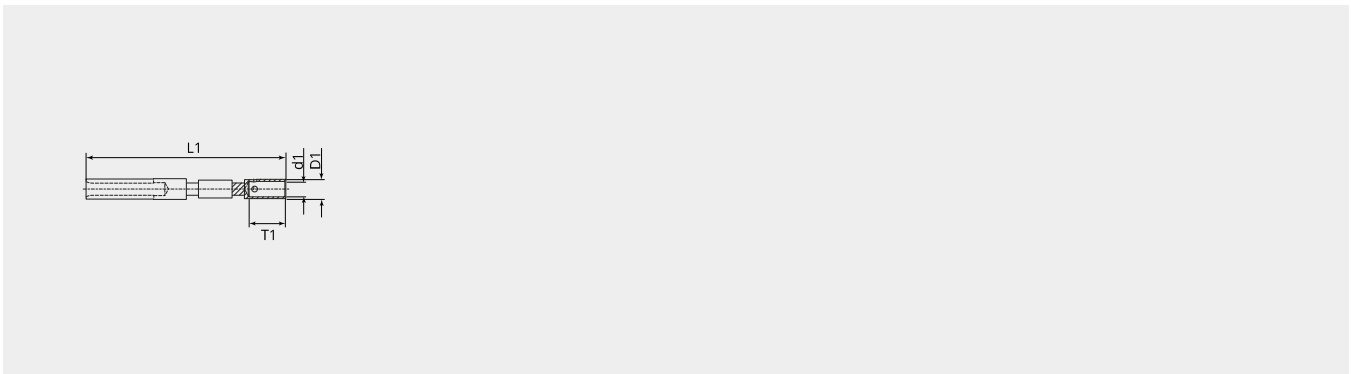

Dimensional drawing

| | |
|----------|------|
| D1 (Ø): | 1.65 |
| d1 (Ø): | 1.1 |
| L1 (mm): | 17.8 |
| T1 (mm): | 3.8 |