




Metallic protection cap to bayonet receptacle (GB,GR & GS)

Item number: PR24-AC

Packing unit: 1

Mechanical properties

| | |
|---------------------------------|--------------------|
| Size: | 24 |
| Shell material: | Aluminum alloy |
| Surface treatment: | Epoxy-polyurethane |
| Type of surface: | varnished |
| Thickness of surface treatment: | 13-16 μ |
| Surface colour: | black |
| Corrosion resistance (h): | 500 |
| Operation temperature: | -55°C - +125°C |
| Temperature shock: | -55°C - +125°C |
| Conductivity (M Ω): | non conductive |
| EMI: | No |
| Chain material: | Stainless steel |

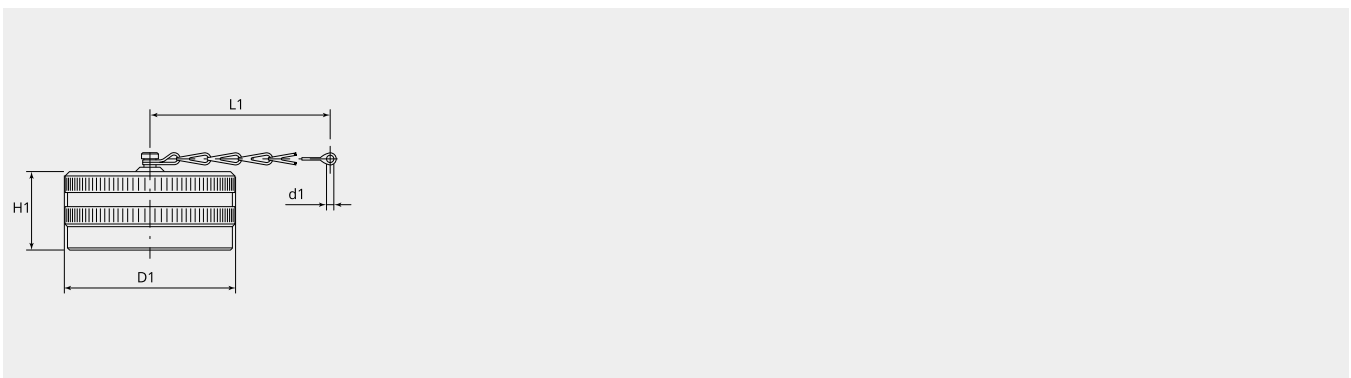

Dimensional drawing

| | |
|----------|-------|
| D1 (Ø): | 47.0 |
| d1 (Ø): | 4.3 |
| L1 (mm): | 127.0 |
| H1 (mm): | 21.7 |

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.