




Pin contact housing D-SUB - 2-poles

Item number: SUH02W2P

Technical characteristics

Size:	1
Shell material:	Steel
Surface treatment:	Tin plated
Material contact insert:	Thermoplastic
Operation temperature:	-55°C - +105°C
Fire protection class UL94:	UL94 - V0

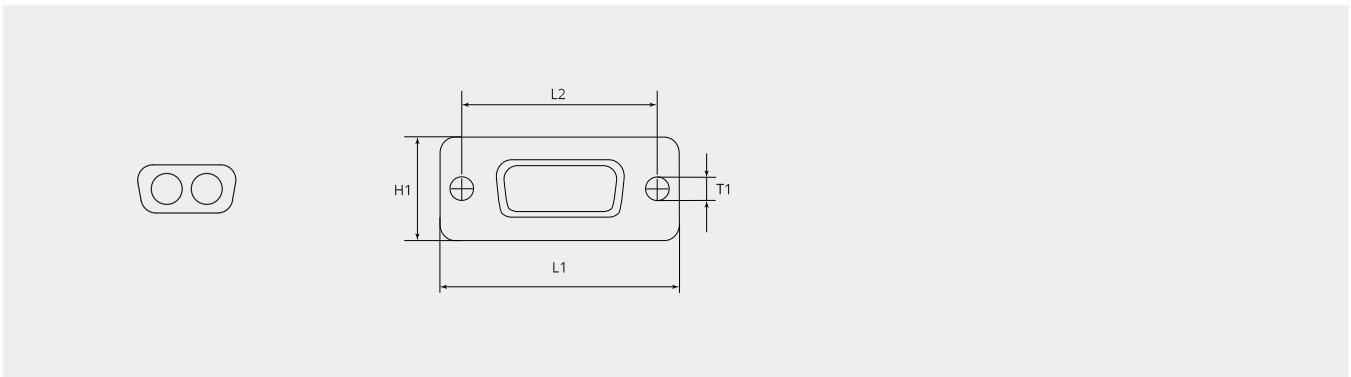


Dimensional drawing

L1 (mm):	30.8
L2 (mm):	25.0
T1 (mm):	3.0
H1 (mm):	12.5


Complementary products:

Contacts:




SUMCP18-22AU1

Machined contact pins



SUMCP18-22AU2

Machined contact pins



SUMCP20-24AU1

Machined contact pins



SUMCP8-11AU1

Pin contact size 8



SUMCP8-11AU2

Pin contact size 8



SUMCP8-14AU1

Pin contact size 8



SUMCP8-14AU2

Pin contact size 8



SUMCP8-18AU1

Pin contact size 8



SUMCP8-18AU2

Pin contact size 8




SUMCP8-8AU1

Pin contact size 8




SUMCP8-8AU2

Pin contact size 8




SUPCP20-24AU2

Pin contact punched



SUPCP20-24AU2-100

Pin contact punched, reel of 10000 pcs.




SUPCP20-24AU2-3

Pin contact punched, reel of 350 pcs.


Accessory:



SUMCP20-24AU2
SUB-D contacts



SUMCP24-28AU1
SUB-D contacts



SUMCP24-28AU2
SUB-D contacts