




Pin contact housing D-SUB - 9-poles

Item number: SUH09P

Technical characteristics

| | |
|-----------------------------|----------------|
| Size: | 1 |
| Shell material: | Steel |
| Surface treatment: | Tin plated |
| Material contact insert: | Thermoplastic |
| Operation temperature: | -55°C - +105°C |
| Fire protection class UL94: | UL94 - V0 |

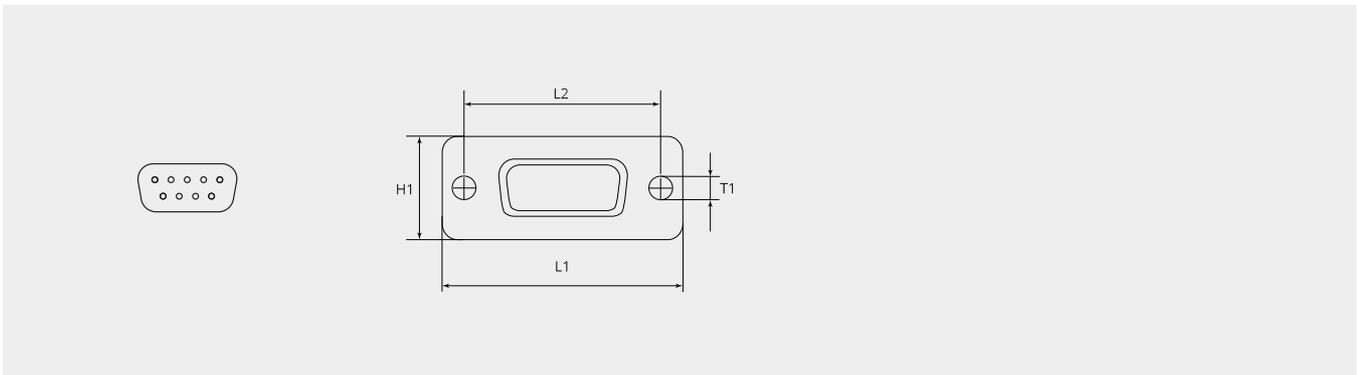

Dimensional drawing

| | |
|----------|------|
| L1 (mm): | 30.8 |
| L2 (mm): | 25.0 |
| T1 (mm): | 3.0 |
| H1 (mm): | 12.5 |

Complementary products:

Contacts:

**SUMCP18-22AU1**

Machined contact pins

**SUMCP18-22AU2**

Machined contact pins

**SUMCP20-24AU1**

Machined contact pins

**SUMCP20-24AU2**

Machined contact pins

**SUPCP20-24AU2**

Pin contact punched

**SUPCP20-24AU2-100**

Pin contact punched, reel of 10000 pcs.

**SUPCP20-24AU2-3**

Pin contact punched, reel of 350 pcs.

**SUMCP24-28AU1**

Machined contact pins

**SUMCP24-28AU2**

Machined contact pins