




Socket contact housing D-SUB - 9-poles

Item number: SUH09W4S

Technical characteristics

Size:	3
Shell material:	Steel
Surface treatment:	Tin plated
Material contact insert:	Thermoplastic
Operation temperature:	-55°C - +105°C
Fire protection class UL94:	UL94 - V0

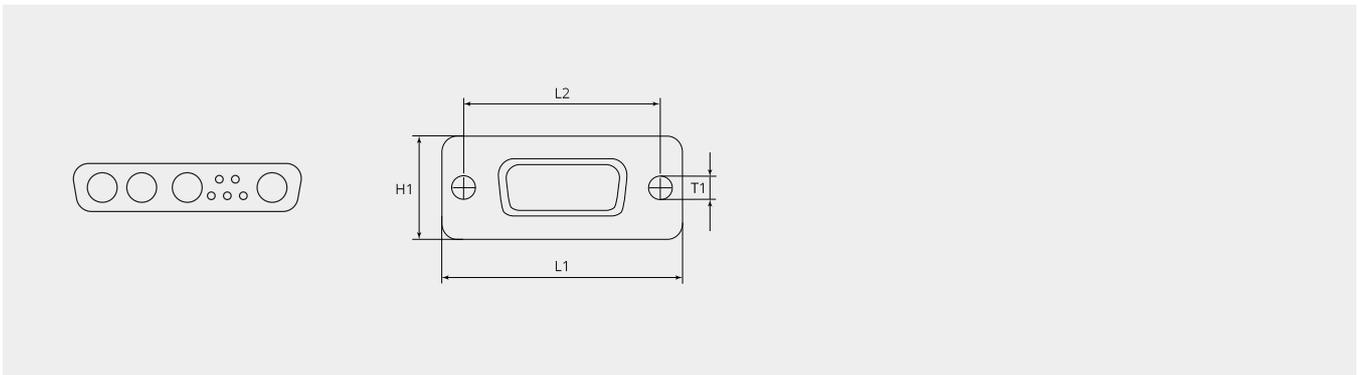

Dimensional drawing

L1 (mm):	53.0
L2 (mm):	47.0
T1 (mm):	3.0
H1 (mm):	12.5

Complementary products:

Contacts:



SUMCS18-22AU1
Machined socket contacts



SUMCS18-22AU2
Machined socket contacts

**SUMCS20-24AU1**

Machined socket contacts

**SUMCS20-24AU2**

Machined socket contacts

**SUMCS8-11AU1**

Socket contact size 8

**SUMCS8-11AU2**

Socket contact size 8

**SUMCS8-14AU1**

Socket contact size 8

**SUMCS8-14AU2**

Socket contact size 8

**SUMCS8-18AU1**

Socket contact size 8

**SUMCS8-18AU2**

Socket contact size 8

**SUMCS8-8AU1**

Socket contact size 8

**SUMCS8-8AU2**

Socket contact size 8

**SUPCS20-24AU2**

Socket contact punched

**SUPCS20-24AU2-100**

Socket contact punched, reel of 10000 pcs.

**SUPCS20-24AU2-3**

Socket contact punched, reel of 350 pcs.

**SUMCS24-28AU1**

Machined socket contacts

**SUMCS24-28AU1-S**

Machined socket contacts



SUMCS24-28AU2

Machined socket contacts