

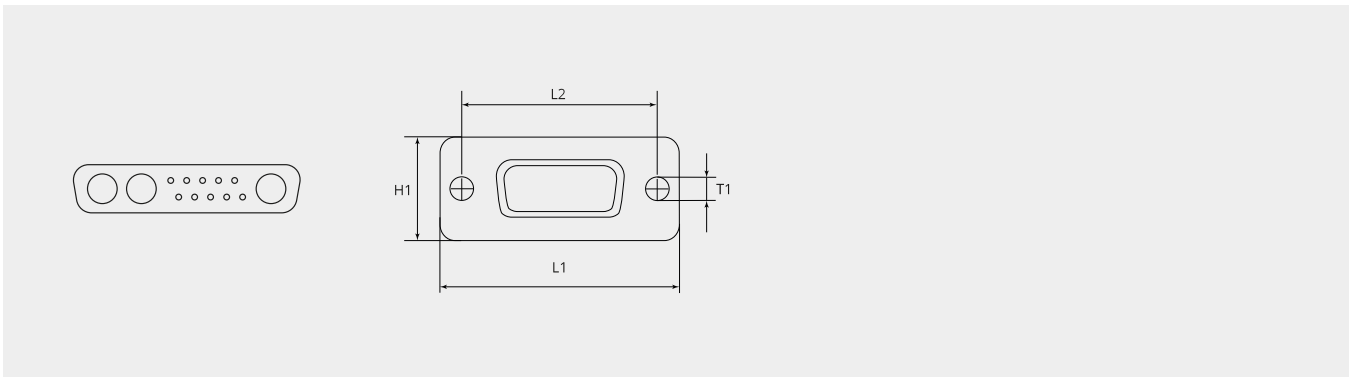


Pin contact housing D-SUB - 13-poles

Item number: SUH13W3P

Technical characteristics

Size:	3
Shell material:	Steel
Surface treatment:	Tin plated
Material contact insert:	Thermoplastic
Operation temperature:	-55°C - +105°C
Fire protection class UL94:	UL94 - V0



Dimensional drawing

L1 (mm):	53.0
L2 (mm):	47.0
T1 (mm):	3.0
H1 (mm):	12.5

Complementary products:








Contacts:



SUMCP18-22AU1
Machined contact pins



SUMCP18-22AU2
Machined contact pins

	SUMCP20-24AU1 Machined contact pins
	SUMCP20-24AU2 Machined contact pins
	SUMCP8-11AU1 Pin contact size 8
	SUMCP8-11AU2 Pin contact size 8
	SUMCP8-14AU1 Pin contact size 8
	SUMCP8-14AU2 Pin contact size 8
	SUMCP8-18AU1 Pin contact size 8
	SUMCP8-18AU2 Pin contact size 8
	SUMCP8-8AU1 Pin contact size 8
	SUMCP8-8AU2 Pin contact size 8
	SUPCP20-24AU2 Pin contact punched
	SUPCP20-24AU2-100 Pin contact punched, reel of 10000 pcs.
	SUPCP20-24AU2-3 Pin contact punched, reel of 350 pcs.
	SUMCP24-28AU1 Machined contact pins
	SUMCP24-28AU2 Machined contact pins