

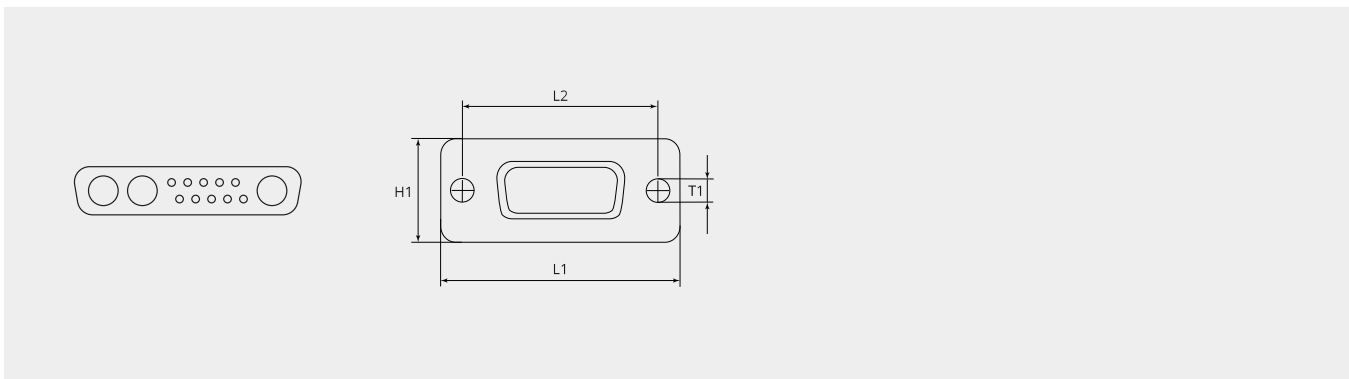


Socket contact housing D-SUB - 13-poles

Item number: SUH13W3S

Technical characteristics

Size:	3
Shell material:	Steel
Surface treatment:	Tin plated
Material contact insert:	Thermoplastic
Operation temperature:	-55°C - +105°C
Fire protection class UL94:	UL94 - V0



Dimensional drawing

L1 (mm):	53.0
L2 (mm):	47.0
T1 (mm):	3.0
H1 (mm):	12.5

Complementary products:







Contacts:



SUMCS18-22AU1
Machined socket contacts



SUMCS18-22AU2
Machined socket contacts

	SUMCS20-24AU1 Machined socket contacts
	SUMCS20-24AU2 Machined socket contacts
	SUMCS8-11AU1 Socket contact size 8
	SUMCS8-11AU2 Socket contact size 8
	SUMCS8-14AU1 Socket contact size 8
	SUMCS8-14AU2 Socket contact size 8
	SUMCS8-18AU1 Socket contact size 8
	SUMCS8-18AU2 Socket contact size 8
	SUMCS8-8AU1 Socket contact size 8
	SUMCS8-8AU2 Socket contact size 8
	SUPCS20-24AU2 Socket contact punched
	SUPCS20-24AU2-100 Socket contact punched, reel of 10000 pcs.
	SUPCS20-24AU2-3 Socket contact punched, reel of 350 pcs.
	SUMCS24-28AU1 Machined socket contacts
	SUMCS24-28AU1-S Machined socket contacts



SUMCS24-28AU2

Machined socket contacts