



SUB-D contacts


Machined contact pins

Item number: SUMCP18-22AU1

Packing unit: 100

Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	Gold plated, 1.3µm over 2.0µm Ni
Wire section (mm ²):	0.34 - 1.00
Wire section (AWG):	22 - 18

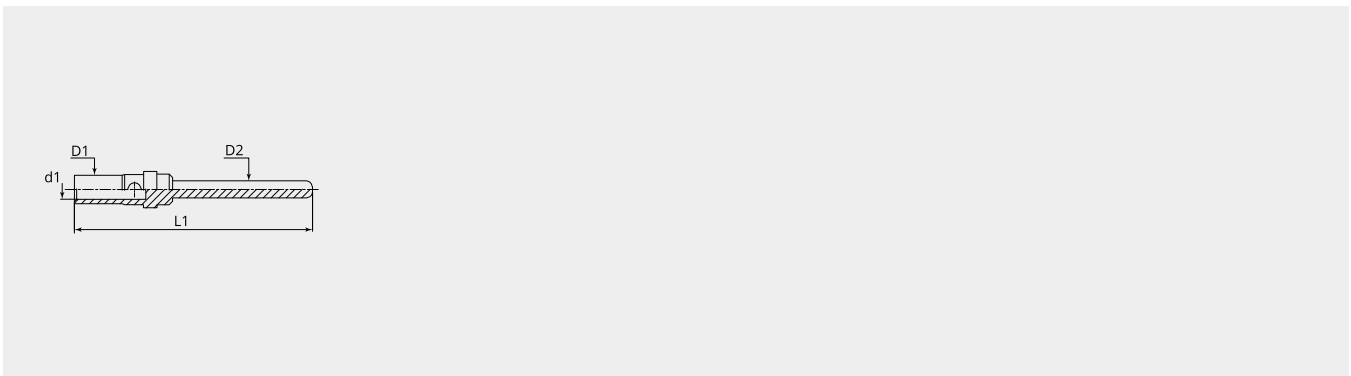

Dimensional drawing

D1 (Ø):	1.7
D2 (Ø):	1.0
d1 (Ø):	1.4
L1 (mm):	14.0