



SUB-D contacts


Machined contact pins

Item number: SUMCP18-22AU2

Packing unit: 100

Mechanical properties contacts

| | |
|----------------------------------|----------------------------------|
| Contact type: | Pin |
| Strand/wire adaptation: | Crimp |
| Number of mating cycles (min.): | 200 |
| Contact Material: | CU alloy |
| Protective layer: | Gold plated, 0.8µm over 1.2µm Ni |
| Wire section (mm ²): | 0.34 - 1.00 |
| Wire section (AWG): | 22 - 18 |

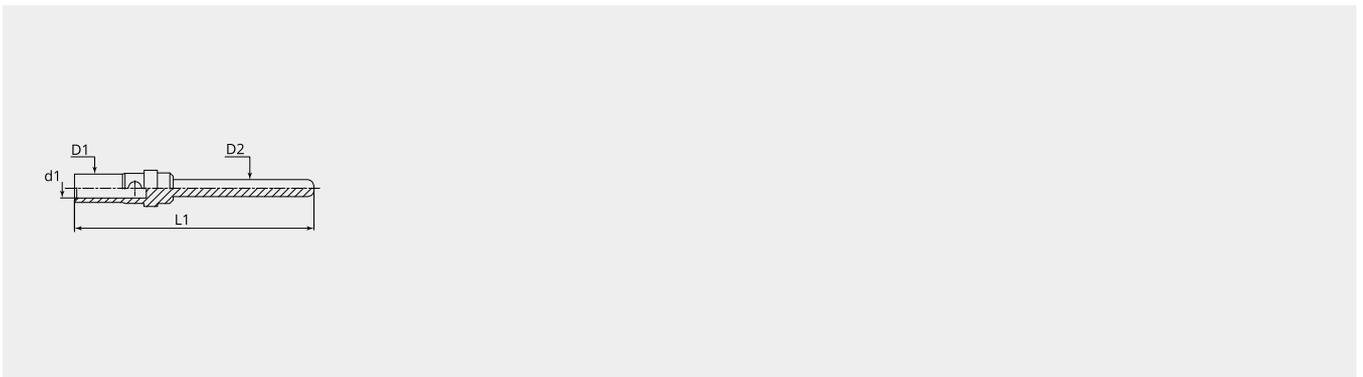

Dimensional drawing

| | |
|----------|------|
| D1 (Ø): | 1.7 |
| D2 (Ø): | 1.0 |
| d1 (Ø): | 1.4 |
| L1 (mm): | 14.0 |