



# SUB-D contacts


## Machined socket contacts

Item number: SUMCS18-22AU2

Packing unit: 100

### Mechanical properties contacts

Contact type:	Socket
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.8µm over 1.2µm Ni
Wire section (mm <sup>2</sup> ):	0.34 - 1.00
Wire section (AWG):	22 - 18

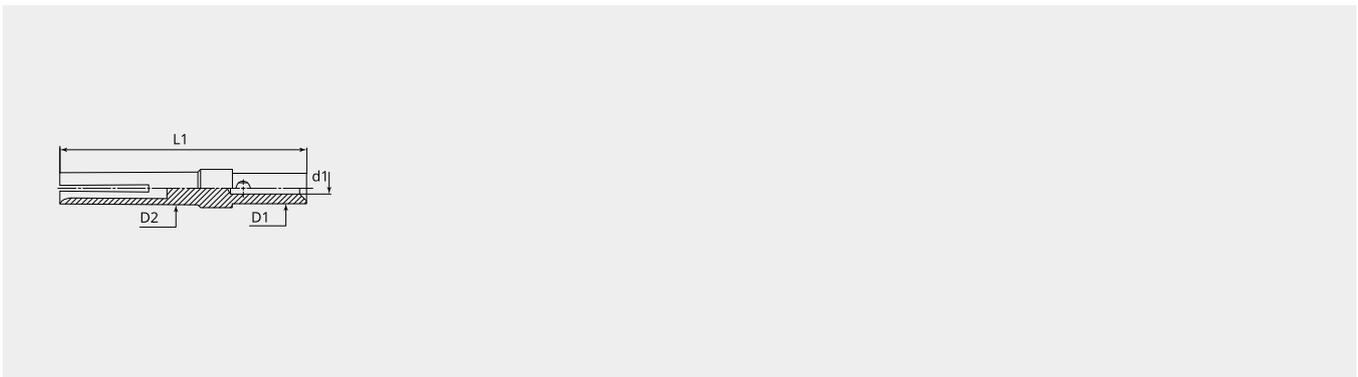

### Dimensional drawing

D1 (Ø):	1.7
D2 (Ø):	1.8
d1 (Ø):	1.4
L1 (mm):	13.6