



# SUB-D contacts


## Machined socket contacts

Item number: SUMCS20-24AU1

Packing unit: 100

### Mechanical properties contacts

<b>Contact type:</b>	Socket
<b>Strand/wire adaptation:</b>	Crimp
<b>Number of mating cycles (min.):</b>	500
<b>Contact Material:</b>	CU alloy
<b>Protective layer:</b>	Gold plated, 1.3µm over 2.0µm Ni
<b>Wire section (mm<sup>2</sup>):</b>	0.25 - 0.75
<b>Wire section (AWG):</b>	24 - 20

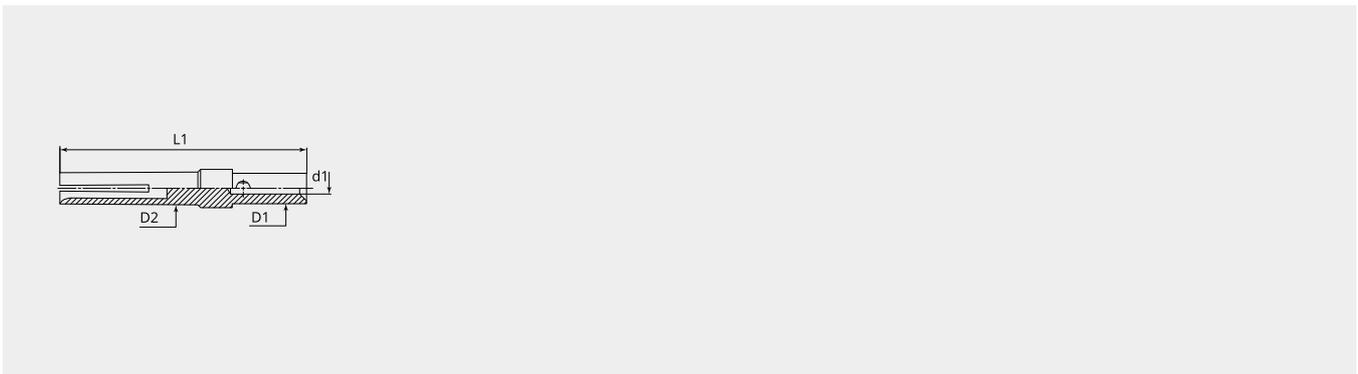

### Dimensional drawing

<b>D1 (Ø):</b>	1.7
<b>D2 (Ø):</b>	1.8
<b>d1 (Ø):</b>	1.1
<b>L1 (mm):</b>	13.6