



SUB-D contacts


Pin contact punched

Item number: SUPCP20-24AU2

Net weight: 0.009 kg

Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.8µm over 1.2µm Ni
Wire section (mm ²):	0.2 - 0.56
Wire section (AWG):	24 - 20

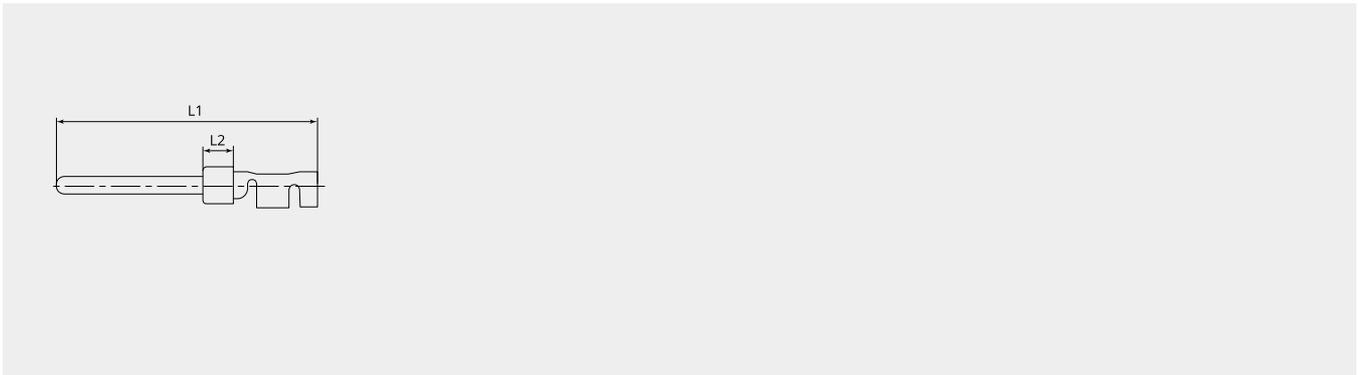

Dimensional drawing

L1 (mm):	14.6
L2 (mm):	1.7

Complementary products:

Tools:



GIW10V

Mechanical hand press tool GIW10



GIM10VHD20

Press-head for GIW10V