



# SUB-D contacts


Pin contact punched

Item number: SUPCP20-24AU2

Net weight: 0.009 kg

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	200
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.8µm over 1.2µm Ni
Wire section (mm <sup>2</sup> ):	0.2 - 0.56
Wire section (AWG):	24 - 20

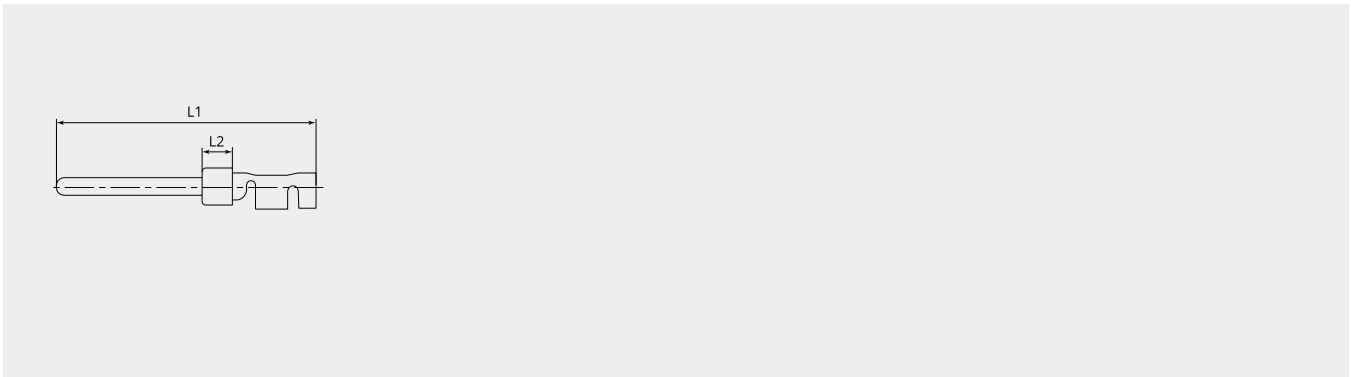

## Dimensional drawing

L1 (mm):	14.6
L2 (mm):	1.7

## Complementary products:

### Tools:



#### **GIW10V**

Mechanical hand press tool GIW10



#### **GIM10VHD20**

Press-head for GIW10V