


SUB-D contacts

Pin contact punched, reel of 10000 pcs.

Item number: SUPCP20-24AU2-100

Mechanical properties contacts

| | |
|----------------------------------|----------------------------------|
| Contact type: | Pin |
| Strand/wire adaptation: | Crimp |
| Number of mating cycles (min.): | 200 |
| Contact Material: | CU alloy |
| Protective layer: | Gold plated, 0.8µm over 1.2µm Ni |
| Wire section (mm ²): | 0.2 - 0.56 |
| Wire section (AWG): | 24 - 20 |

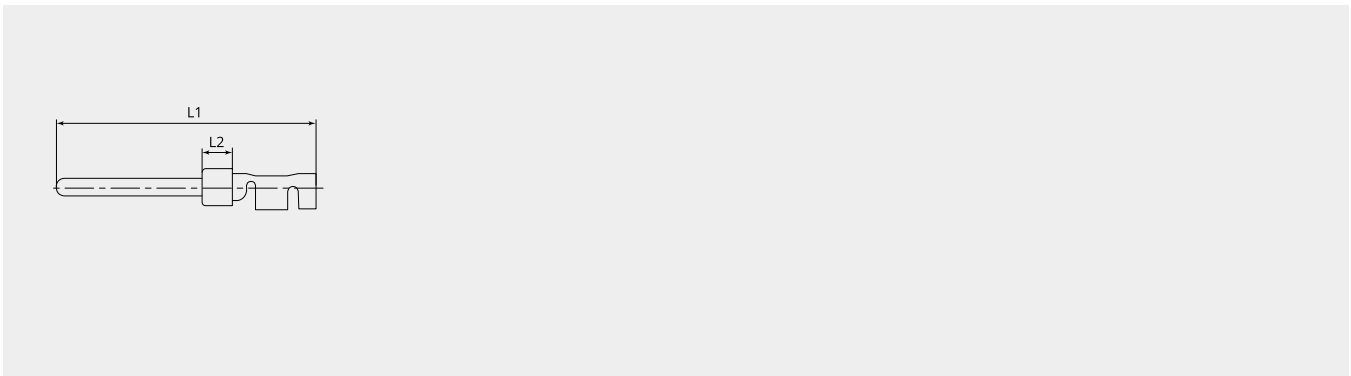

Dimensional drawing

| | |
|----------|------|
| L1 (mm): | 14.6 |
| L2 (mm): | 1.7 |