



Plug cover set TRAC3ST

Sub-D plug with up to 4 straight cable entries, metric thread, size 2

Item number: TRAC3ST3-8


Stable die-cast zinc hoods with up to three straight cable outlets and excellent contacting between hood and cable clamp (also if currents are higher) The connectors meet the protection class IP44 according to EN 60529. Each cable entry can be fitted with a 360° EMI shield connection with integrated strain relief. All connectors can be coded if needed also after assembly.

The key characteristics of these railway suitable connectors are the following:

stable zinc-cast hood | strain relief on the cable | 360° shield contacting on the cable clamp with a shield bushing | excellent contacting between hood and cable clamp | easy to code | all accessory screws made of stainless steel

Technical characteristics

Size:	3
Shell material:	Zinc cast
Surface treatment:	Non
Type of surface:	self passivating
Surface colour:	grey
Corrosion resistance (h):	100
EMI:	Yes
No. of cable entrances:	3
Screw material:	Stainless steel V2
Operation temperature:	-55°C - +105°C
Fire protection class UL94:	UL94 - V0

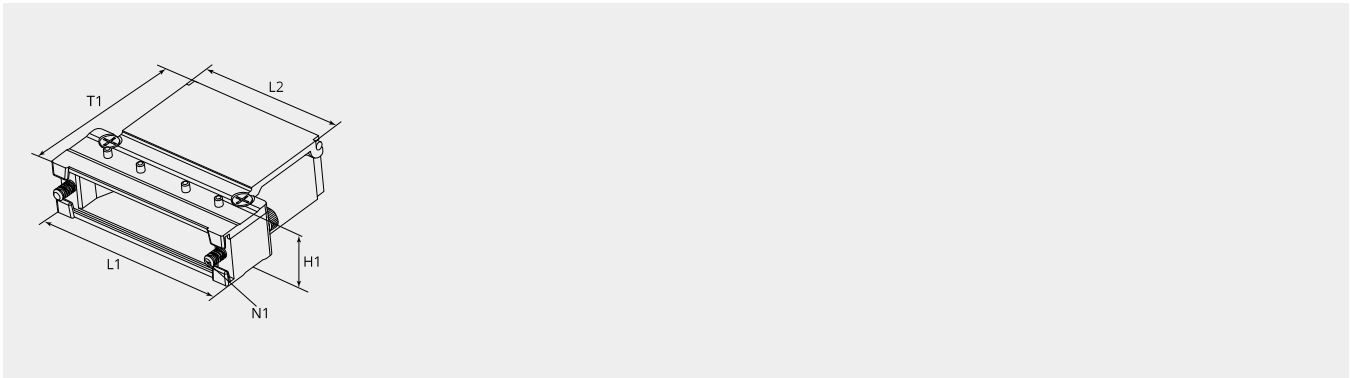

Dimensional drawing

L1 (mm):	53.3
L2 (mm):	40.3
N1:	M3
T1 (mm):	42.5
H1 (mm):	17.9