



Receptacle with threaded coupling, front panel mount

Series GT

Item number: GT210-14S-6PN-EAC


Packing unit: 1

Mechanical properties

Size:	14S
Contact type:	Pin
Coding options:	1
Shell material:	Aluminum alloy
Surface treatment:	Epoxy-polyurethane
Type of surface:	varnished
Thickness of surface treatment:	13-16µ
Surface colour:	black
Corrosion resistance (h):	500
Operation temperature:	-55°C - +125°C
Temperature shock:	-55°C - +125°C
Conductivity (MΩ):	non conductive
EMI:	No
Coupling-torque to lock (Nm):	max. 1.8
Coupling-torque to open (Nm):	min. 0.55

Thermal properties

Material contact insert:	Ethylene acrylate GXF
Operating temperature:	-55°C - +150°C
Fire protection class DIN EN 45545-2:	R23/HL3

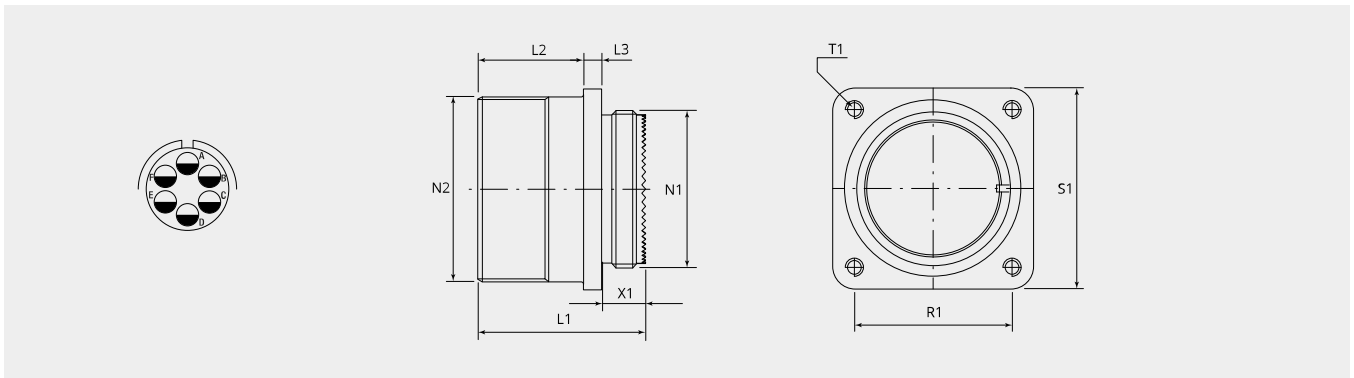

Dimensional drawing

D1 (Ø):	24.6
L1 (mm):	30.0
L2 (mm):	18.2
L3 (mm):	3.2
N1:	3/4"-20 UNEF 2A
N2:	7/8"-20 UNEF 2A
T1 (mm):	3.2
X1 (mm):	9.0
S1 (mm):	30.2
R1 (mm):	23.0

Electrical properties

Operating voltage DC (V):	250
Operating voltage AC (V):	200
Test voltage AC (V):	1000
Insulation resistance (Ω m):	≥ 5000
Insulation creepage distance (mm):	≥ 1.6
Voltage class:	MIL-DTL-5015

Electrical properties contacts

Size 16S - nominal current (A):	13
Size 16S - maximal current (A):	22
Size 16S - test current (A):	20

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Voltage classes tested acc. MIL-DTL-5015

Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37

Corrosion resistance tested acc. MIL 1344A Test 101.1

Temperature shock tested acc. MIL 202F, 107G Method

Electrical conductivity acc. MIL 1344A, Test 3007

Complementary products:

Counterpart:



GT60-14S-6SN-EAC

Plug with threaded coupling nut

Backshell:



BEN14-AA

90° elbow backshell



BEN14-M2B-AA

90° elbow backshell with internal metric thread




BSH14-AA

Backshell with groove for heatshrinkable shapes



BSL14-AA

Backshell straight, long



BSN14-AA

Backshell straight, standard



BSN14-M2B-AA

Backshell straight with internal metric thread



BST14-AA

Termination back shell typ R for grommet



ET-14-02-AA

EMI adapter with cone ring, for heatshrinkable shape



ET-14-03-AA


EMI adapter with cone ring, for heatshrinkable shape

Contacts:



10-40553-05AU

Pin contact size 16S, 0.25 - 0.5mm²



10-40553AU

Pin contact size 16S, 0.75 - 1.5mm²

Filler plugs:



10-101033-121

Filler plug, size 16/16S

Accessory:



10-40450-14

Sealing gasket for receptacle, front panel mount



10-40450-14S

Sealing gasket for receptacle, front panel mount, conductive



10-40451-14

Sealing gasket for receptacle, rear panel mount



10-40451-14S

Sealing gasket for receptacle, rear panel mount, conductive