



Receptacle with threaded coupling, front panel mount

Series GT

Item number: GT210-36-10SN-EAC


Packing unit: 1

Mechanical properties

| | |
|---------------------------------|--------------------|
| Size: | 36 |
| Contact type: | Socket |
| Coding options: | 4 |
| Number of contacts, size 16: | 48 |
| Shell material: | Aluminum alloy |
| Surface treatment: | Epoxy-polyurethane |
| Type of surface: | varnished |
| Thickness of surface treatment: | 13-16 μ |
| Surface colour: | black |
| Corrosion resistance (h): | 500 |
| Operation temperature: | -55°C - +125°C |
| Temperature shock: | -55°C - +125°C |
| Conductivity (M Ω): | non conductive |
| EMI: | No |
| Coupling-torque to lock (Nm): | max. 9.0 |
| Coupling-torque to open (Nm): | min. 4.5 |

Thermal properties

| | |
|---------------------------------------|-----------------------|
| Material contact insert: | Ethylene acrylate GXF |
| Operating temperature: | -55°C - +150°C |
| Fire protection class DIN EN 45545-2: | R23/HL3 |

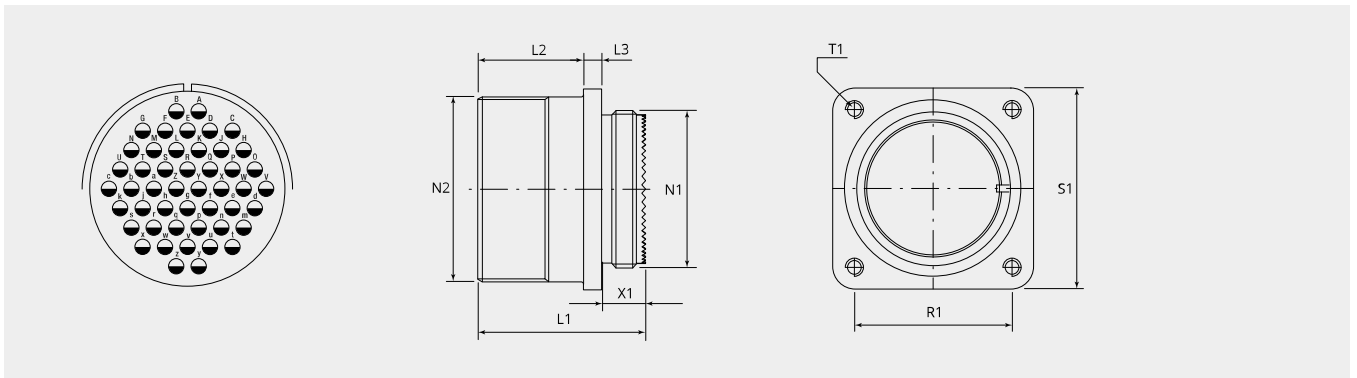

Dimensional drawing

| | |
|-----------------|------------------|
| D1 (∅): | 60.0 |
| L1 (mm): | 39.5 |
| L2 (mm): | 24.1 |
| L3 (mm): | 4.0 |
| N1: | 2 1/16"-16 UN 2A |
| N2: | 2 1/4"-16 UN 2A |
| T1 (mm): | 4.3 |
| X1 (mm): | 11.3 |
| S1 (mm): | 63.5 |
| R1 (mm): | 49.2 |

Electrical properties

| | |
|---|--------------|
| Operating voltage DC (V): | 700 |
| Operating voltage AC (V): | 500 |
| Test voltage AC (V): | 2000 |
| Insulation resistance (Ω m): | ≥ 5000 |
| Insulation creepage distance (mm): | ≥ 3.2 |
| Voltage class: | MIL-DTL-5015 |

Electrical properties contacts

| | |
|--|----|
| Size 16 - nominal current [continuous] (A): | 13 |
| Size 16 - maximal current [short-term] (A): | 22 |
| Size 16 - test current (A): | 20 |

Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.

Voltage classes tested acc. MIL-DTL-5015

Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37

Corrosion resistance tested acc. MIL 1344A Test 101.1

Temperature shock tested acc. MIL 202F, 107G Method

Electrical conductivity acc. MIL 1344A, Test 3007